

KAM1-BN12

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Kazuo Ohba

Serial No.: 09/701,504 ✓  
(PCT/JP00/02980)

Filed: November 29, 2000

For: ARM FOR ELASTIC DOLL, METHOD FOR  
MOLDING SAME AND MOLD THEREFOR

RECEIVED

OCT 11 2001

TC 1700

April 17, 2001

Irvine, CA 92614

RECEIVED

18 MAY 2001

Legal Staff  
International Division

RECEIVED

MAY 23 2001

Technology Center 2100

PETITION UNDER 37 CFR 1.182 TO RECEIVE A FILING DATE

04/19/2001 UEDUWIJE 00000101 09701504

01 FC:122

130.00 OP

Assistant Commissioner for Patents  
PCT LEGAL AFFAIRS  
Crystal Plaza 2  
2011 S. Clark Pl.  
Arlington, VA 22202

*Wrong Serial # but  
can't find the right*

RECEIVED

MAY 03 2001

OFFICE OF PETITIONS  
DEPUTY A/C PATENTS

Dear Madam/Sir:

Applicant petitions that the filing date of November 29, 2000, be granted on the above application.

The above-identified application was filed on November 29, 2000, by Express Mail, Label No. EL227718351US. A copy of the specification and claims, drawings, oath, assignment and cover sheet, Preliminary Amendment, and express mail certificates are attached.

On December 1, 2000, it was noted that the year in the PCT number was erroneously indicated as "PCT/JP99/02980" instead of "PCT/JP00/02980." The undersigned attorney's

secretary called the PCT Help Desk to inquire as to what could be done to correct this error and still receive the filing date of November 29, 2000. The secretary spoke with a Joe Pelham at 703/308-1709 and was told to file a petition under § 1.182 with a fee of \$130.00 and that a faxed petition would expedite the matter. A Petition Under 37 CFR 1.182 to Correct Transmittal Letter to the United States Designated/Elected Office (DO/EO/LUS) Concerning a Filing Under 35 USC 371 with a corrected transmittal letter was faxed on December 1, 2000, see Exhibit A.

On December 7, 2000, a serial number and filing date were received, see Exhibit B. A letter was faxed to Mr. Pelham to indicate that a serial number had been received, see Exhibit C. The secretary also called Mr. Pelham to let him know that the fax was coming.

Some time later, Mr. Pelham left a message on the undersigned attorney's voice mail that the petition and letter had been received and that he was trying to match the petition and letter with the application.

The filing fee of \$1,194.00 was submitted with the application and the check was cashed on December 5, 2000. A copy of both sides of the check are attached as Exhibit D.


Attached is the petition fee of \$130.00. Please charge any additional fees to our deposit account No. 16-2462. A copy of this petition is enclosed for that purpose.

The undersigned attorney hereby certifies that the attached application is a true and correct copy of the application as submitted to the U.S. Patent Office on November 29, 2000.

If there are any questions with regard to this matter, please contact the undersigned attorney at the listed telephone number.

Very truly yours,

PRICE AND GESS



---

Joseph W. Price, Reg. No. 25,124  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614  
949/261-8433

KAM1-BN12

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Kazuo Ohba

Serial No.: PCT/JP00/02980

Filed: May 10, 2000

For: ARM FOR ELASTIC DOLL, METHOD  
FOR MOLDING SAME AND MOLD  
THEREFOR

December 1, 2000

Irvine, CA 92614

**RECEIVED**

**MAY 23 2001**

**Technology Center 2100**

**FAXED**

**PETITION UNDER 37 CFR 1.182 TO CORRECT  
TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

**VIA FAX  
703/308-6459**

Assistant Commissioner for Patents  
Washington, DC 20231

Attn: Joe Pelham  
PCT/Legal Affairs

Dear Mr. Pelham:

The transmittal letter for the entry into the national phase of the above-identified application contained a typographical error in that the PCT application was indicated as "PCT/JP99/02980". The correct PCT application number is --PCT/JP00/02980--. A corrected transmittal letter is attached. It is requested that the express mail filing date of November 29, 2000, be granted for entry into the national phase in the United States.

Please charge the petition fee to our deposit account No. 16-2462. A copy of this letter is attached for that purpose.


If there are any questions with regard to this matter, please contact the undersigned attorney at the listed telephone number.

I hereby certify that this correspondence is being facsimile transmitted to the U.S. Patent Office on December 1, 2000, by Barbara O'Neill

Barbara O'Neill

Very truly yours,

PRICE AND GESS

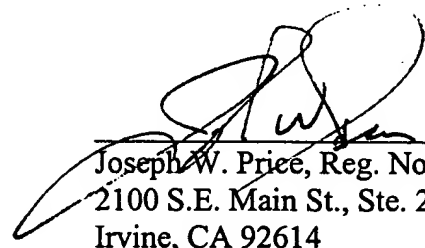  
\_\_\_\_\_  
Joseph W. Price, Reg. No. 25,124  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614  
949/261-8433

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371****KAM1-BN12**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.  
**PCT/JP00/02980**INTERNATIONAL FILING DATE  
**May 10, 2000**PRIORITY DATE CLAIMED  
**May 10, 1999**

## TITLE OF INVENTION

**ARM FOR ELASTIC DOLL, METHOD FORMOLDING SAME AND MOLD THEREFOR**

## APPLICANT(S) FOR DO/EO/US

**Kazuo Ohba**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 13 to 20 below concern document(s) or information included:**

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☐ Other items or information:

21. The following fees are submitted:

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :**

☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1,000.00

☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$860.00

☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00

☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00

☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). ☐ 20    ☐ 30

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	23 - 20 =	3	x \$18.00	\$54.00
Independent claims	6 - 3 =	3	x \$80.00	\$240.00
Multiple Dependent Claims (check if applicable). <span style="float: right;"><input type="checkbox"/></span>				\$0.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1,154.00
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <span style="float: right;"><input type="checkbox"/></span>				\$0.00
<b>SUBTOTAL =</b>				\$1,154.00
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <span style="float: right;"><input type="checkbox"/> 20    <input type="checkbox"/> 30</span>				\$0.00
<b>TOTAL NATIONAL FEE =</b>				\$1,154.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <span style="float: right;"><input checked="" type="checkbox"/></span>				\$40.00
<b>TOTAL FEES ENCLOSED =</b>				\$1,194.00
				Amount to be: refunded \$
				charged \$

RECEIVED

MAY 23 2001

Technology Center 2100

☒ A check in the amount of **\$1,194.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **16-2462** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Joseph W. Price, Reg. No. 25,124  
PRICE AND GESS  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614  
Tel: 949/261-8433  
Fax: 949/261-9071

SIGNATURE

Joseph W. Price

NAME

25,124

REGISTRATION NUMBER

November 29, 2000

DATE

PRINT DATE = DEC. 01 '00
PRINT TIME = 15:22

## TX RESULT REPORT

FUNCTION	No.	DESTINATION STATION	DATE	TIME	PAGE	COMM. TIME	MODE	RESULT
TX	1	17033086459	DEC. 01	15:18	6	0H02' 05"	STD	OK



Received in the U.S. Patent Office  
Kindly date-stamp and return this card with  
Early Notification of Serial No. (if Applicable)

Date: Nov. 29, 2000 Serial No.:

Client: Kammon International

For: ARM FOR ELASTIC DOLL, METHOD FOR MOLDING SAME...

Dkt. No.: KAM1-BN12

**09/701504**

Enclosed Are:

☒ Specification and Claims (PP<sub>34</sub>)

☒ Drawings (14 sheets)

☒ Formal ☐ Informal

☐ Info. Disc. Statement

☒ Check #31584 For \$1,194.00

☐ Priority Documents

☐ PTO 1449 W/References

☐ Small Entity Verification

☐ Other

☒ Executed Declaration, Power of Attorney

☒ Assignment w/cover sheet +1cc

☒ Amendment (Preliminary)

☐ Certificate of Mailing

☐ Issue Fee Transmittal


☒ Transmittal Letter (Pat.App.) +1cc

☐ Extension of Time

☐ Express Mail No.

**527 Rec'd PCT/PTO 29 NOV 2000**

IDS due: 2-28-01

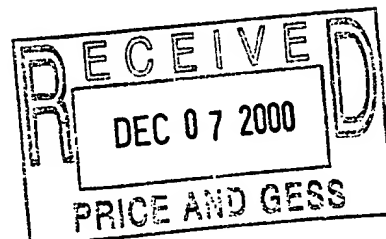

13  
KAM1-BN12

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Kazuo Ohba

Serial No.: 09/701,504  
(PCT/JP00/02980)

Filed: November 29, 2000

For: ARM FOR ELASTIC DOLL, METHOD  
FOR MOLDING SAME AND MOLD  
THEREFOR

**RECEIVED**  
December 14, 2000

Irvine, CA 92614

**LETTER**

**VIA FAX**  
**703/308-6459**

Assistant Commissioner for Patents  
Washington, DC 20231

Attn: Joe Pelham  
PCT/Legal Affairs

Dear Mr. Pelham:

Applicant submitted a Petition Under 37 CFR 1.182 to Correct Transmittal Letter to the United States Designated/Elected office (DO/EO/US) Concerning a Filing Under 35 USC 371 by identifying the application with the international filing number, PCT/JP00/02980. Applicant hereby informs the PCT Branch that a serial number has now been received, namely 09/701,504, to ensure that the petition has been matched with the correct file. A copy of the petition is also attached.


If there are any questions with regard to this matter, please contact the undersigned attorney at the listed telephone number.

I hereby certify that this correspondence is being facsimile transmitted to the U.S. Patent Office on December 14, 2000, by Barbara O'Neill

Barbara O'Neill

Very truly yours,

PRICE AND GESS

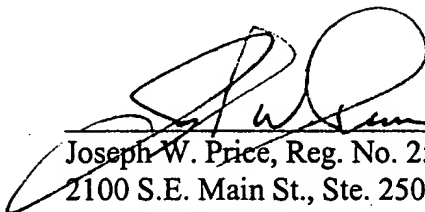  
Joseph W. Price, Reg. No. 25,124  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614  
949/261-8433

PRINT DATE = DEC. 14 '00  
PRINT TIME = 13:51TX RESULT REPORT

FUNCTION	No.	DESTINATION STATION	DATE	TIME	PAGE	COMM. TIME	MODE	RESULT
TX	1	17033086459	DEC. 14	13:48	6	0H02' 03"	STD	OK

**PRICE, GESS & UBELL**

LAW CORPORATION  
2100 S.E. MAIN ST., STE. 250 714-261-8433  
IRVINE, CA 92714

**MANUFACTURERS BANK**

1301 DOVE ST.  
NEWPORT BEACH, CALIFORNIA 92660

31584

16-2607/1222

DATE 29 November 2000

PAY **\*\*\*One Thousand One Hundred Ninety-Four and XX/100\*\*\*** DOLLARS **\$\*\*1,194.00\*\***

TO  
THE  
ORDER  
OF

260401285 012 0145 2122 09 26

Commissioner of Patents and Trademarks

⑆122226076⑆ 2000083 327⑈ ⑈0000119400⑈

PATENT AND TRADEMARK OFFICE

13-1A-0006

FOR CREDIT TO THE

U.S. TREASURY

DO NOT WRITE, STAMP OR SIGN BELOW THIS LINE  
RESERVED FOR FINANCIAL INSTITUTION USE \*

0022 77734

FIRST VIRGINIA BANK  
402 ARLINGTON BLVD.  
FALLS CHURCH, VA  
1-800-523-9493

⑆056001118⑆

REC-50

The Security status of this document is as follows, as well as those not stated below, as well as those guidelines.

Security Features:  
MicroPrint Signature Line  
Chemical Protection  
Erasable Print  
Security Screen

document alteration:  
None in signature line appears  
None in MicroPrint line when photocopied  
None in spots appear with  
chemical alteration  
White mark appears when erased  
Absence of "Original Document"  
Verbiage on back of check

RS-1

EL227718351US




POST OFFICE TO ADDRESSEE

ORIGIN (POSTAL USE ONLY)

PO ZIP Code 94926	Day of Delivery Next <input checked="" type="checkbox"/> Second <input type="checkbox"/>	Flat Rate Envelope <input type="checkbox"/>
Date In 11 29 00	Time In 12 Noon <input type="checkbox"/> 3 PM <input type="checkbox"/>	Postage \$1.53
Weight 1.75 lbs.	Int'l Alpha Country Code	Return Receipt Fee \$2.80
No Delivery Weekend <input type="checkbox"/> Holiday <input type="checkbox"/>	Acceptance Clerk Initials JWP	Total Postage & Fees \$4.33

RECEIVED  
NOV 30 2000  
PRICE AND GESS

SEE REVERSE SIDE FOR  
SERVICE GUARANTEE AND LIMITS  
ON INSURANCE COVERAGE



Customer Copy  
Label 11-F July 1997

CUSTOMER USE ONLY

METHOD OF PAYMENT:  
Express Mail Corporate Acct. No.

☐ WAIVER OF SIGNATURE (Domestic Only): Additional merchandise insurance is void if waiver of signature is requested.  
☐ I wish delivery to be made without obtaining signature of addressee or addressee's agent (if delivery employee judges that article can be left in secure location) and I authorize that delivery employee's signature constitutes valid proof of delivery.

Federal Agency Acct. No. or  
Postal Service Acct. No.

FROM: (PLEASE PRINT)  
PRICE GESS & RUBELL  
2100 MAIN ST STE 250  
IRVINE CA 92714-6238  
Deposited 11/29/2000  
KAM1-BN12  
JWP

TO: (PLEASE PRINT)  
BOX 0083  
ASSISTANT COMMISSIONER FOR  
PATENTS  
WASHINGTON DC 20231-9998

PRESS HARD.

You are making 3 copies.

FOR PICKUP OR TRACKING CALL 1-800-222-1811

www.usps.gov



► Put to open  
the inside panel only

**EXTREMELY URGENT**  
**MUY URGENTE**

Please Rush To Addressee  
Favor de entregar urgentemente al destinatario

**RECIPIENT**  
The sender has requested notification upon delivery.  
Immediately upon receipt, please telephone:  
Name: \_\_\_\_\_  
Tel. No.: \_\_\_\_\_


**FOR PICKUP OR TRACKING CALL 1-800-222-1811**  
Para recolección o localización, llame al 1-800-222-1811

**DESTINATARIO**  
El remitente ha requerido notificación inmediata contra entrega.  
Por favor llame a:  
Nombre: \_\_\_\_\_  
Teléfono: \_\_\_\_\_



UNITED STATES POSTAL SERVICE

www.usps.com



EL227718351US

EL227718351US



UNITED STATES POSTAL SERVICE™

**POST OFFICE TO ADDRESSEE**

Mailing Label  
Label 11-1-1 July 1997

**ORIGIN (POSTAL USE ONLY)**

PO ZIP Code	Day of Delivery	First Rate Envelope
	<input type="checkbox"/> First <input type="checkbox"/> Second	<input type="checkbox"/>
Date in		Postage
11 29 00	<input type="checkbox"/> 11 Mon <input type="checkbox"/> 1 PM	\$
Time in	<input type="checkbox"/> AM <input type="checkbox"/> PM	Return Receipt Fee
	<input type="checkbox"/> First Day <input type="checkbox"/> Second Day	
Weight	Int'l Alpha Country Code	COB Fee
125.00		Insurance Fee
<input type="checkbox"/> No Delivery <input type="checkbox"/> Yes	Acceptance Clerk Initials	Total Postage & Fees
<input type="checkbox"/> Weekend <input type="checkbox"/> Holiday		\$

**DELIVERY (POSTAL USE ONLY)**

Delivery Attempt	Time	Employee Signature
<input type="checkbox"/> No <input type="checkbox"/> Yes	<input type="checkbox"/> AM <input type="checkbox"/> PM	
Delivery Attempt	Time	Employee Signature
<input type="checkbox"/> No <input type="checkbox"/> Yes	<input type="checkbox"/> AM <input type="checkbox"/> PM	
Delivery Date	Time	Employee Signature
<input type="checkbox"/> No <input type="checkbox"/> Yes	<input type="checkbox"/> AM <input type="checkbox"/> PM	
Signature of Addressee or Agent		
Name - Please Print		

**CUSTOMER USE ONLY**

Postnet Agency Code, No. or  
Postnet Office Code, No.

FROM: (PLEASE PRINT) PHONE: 949, 261-8433

PRICE GESS & UBELL  
2100 MAIN ST STE 250  
ARVINE CA 92714-6238  
Deposited 11/29/2000  
KAM1-BN12  
JWP

**TO: (PLEASE PRINT)** PHONE: \_\_\_\_\_

BOX PC  
ASSISTANT COMMISSIONER FOR  
PATENTS  
WASHINGTON DC 20231-9998

**PRESS HARD.**  
You are making 3 copies.

**FOR PICKUP OR TRACKING CALL 1-800-222-1811**

www.usps.gov



This packaging is the property of the U.S. Postal Service and is provided solely for use in sending Express Mail. Misuse may be a violation of federal law.

Este empaque es propiedad del Servicio P  
los Estados Unidos y se proporciona sólo para el envío de correo Express  
del código penal federal. El uso intencional constituye infracciones

BP-3A SEPTEMBER 1999

© USPS 1999

Received in the U.S. Patent Office  
Kindly date-stamp and return this card with  
Early Notification of Serial No. (if Applicable)

Date: Nov. 29, 2000 Serial No.:  
Client: Kammon International  
For: ARM FOR ELASTIC DOLL, METHOD FOR MOLDING SAME...  
Dkt. No.: KAM1-BN12

Enclosed Are:

<input checked="" type="checkbox"/> Specification and Claims (PP <sub>3</sub> 4 )	<input checked="" type="checkbox"/> Executed Declaration, Power of Attorney
<input checked="" type="checkbox"/> Drawings ( <u>14</u> sheets)	<input checked="" type="checkbox"/> Assignment w/cover sheet +1cc
<input checked="" type="checkbox"/> Formal Informal	<input checked="" type="checkbox"/> Amendment (Preliminary)
<input type="checkbox"/> Info. Disc. Statement	<input type="checkbox"/> Certificate of Mailing
<input checked="" type="checkbox"/> Check # <u>31584</u> For \$ <u>1,194.00</u>	<input type="checkbox"/> Issue Fee Transmittal
<input type="checkbox"/> Priority Documents	<input checked="" type="checkbox"/> Transmittal Letter (Pat.App.) +1cc
<input type="checkbox"/> PTO 1449 W/References	<input type="checkbox"/> Extension of Time
<input type="checkbox"/> Small Entity Verification	<input type="checkbox"/> Express Mail No.
<input type="checkbox"/> Other	

**PRICE, GESS & UBELL**

LAW CORPORATION  
2100 S.E. MAIN ST., STE. 250 714-261-8433  
IRVINE, CA 92714

**MANUFACTURERS BANK**  
1301 DOVE ST.  
NEWPORT BEACH, CALIFORNIA 92660

31584

16-2607 / 1222

DATE 29 November 2000

PAY \*\*\*One Thousand One Hundred Ninety-Four and XX/100\*\*\*\*\* DOLLARS \$\*\*1,194.00\*\*

TO  
THE  
ORDER  
OF

Commissioner of Patents and Trademarks

⑆122226076⑆ 2000083 327⑈

PRICE, GESS & UBELL  
2100 S.E. MAIN ST.  
IRVINE, CA

DETACH AND RETAIN THIS STATEMENT  
THE ATTACHED CHECK IS IN PAYMENT OF ITEMS DESCRIBED BELOW.  
IF NOT CORRECT PLEASE NOTIFY US PROMPTLY. NO RECEIPT DESIRED.

DELUXE FORM WVC-3 SPL-LO 989-C

DATE	DESCRIPTION	AMOUNT	DISTRIBUTIONS	
			ACCT. NO.	AMOUNT
11/29/00	PTO filing fee			
	Nat'l phase	\$860.00		
	3 extra total claims	54.00		
	3 extra indep. claims	240.00		
	Assign. rec.	40.00		
			4100-04	\$1,194.00

EMPLOYEE

PERIOD ENDING	EARNINGS		TOTAL EARNINGS	DEDUCTIONS				TOTAL DEDUCTIONS	NET PAY
	Amt. Earned @ Reg. Rate	Overtime And Other		W/H	F.I.C.A.	S.D.I.	State Inc. Tax		





# **PRICE AND GESS**

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

JOSEPH W. PRICE  
ALBIN H. GESS  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

OF COUNSEL  
JAMES F. KIRK

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

e-mail: [pgu@pgulaw.com](mailto:pgu@pgulaw.com)

## **ASSIGNMENT AND COVER SHEET**

Applicant(s):

Kazuo Ohba

Title:

ARM FOR ELASTIC DOLL, METHOD FOR MOLDING  
SAME AND MOLD THEREFOR

Attorney's

Docket No.:

KAM1-BN12

**"EXPRESS MAIL" MAILING**  
**LABEL NO. EL227718351US**

**DATE OF DEPOSIT: November 29, 2000**

# PATENTS ONLY

Tab settings → → → ▼ ▼ ▼ ▼ ▼ ▼ ▼

To the Honorable Commissioner of Patents and Trademarks: Please record the attached original documents or copy thereof.

1. Name of conveying party(ies):  
**Kazuo Ohba**

Additional names(s) of conveying party(ies) ☐ Yes ☒ No

3. Nature of conveyance:

- ☒ Assignment ☐ Merger  
☐ Security Agreement ☐ Change of Name  
☐ Other \_\_\_\_\_

Execution Date: **May 23, 2000**

2. Name and address of receiving party(ies):

Name: **Takara Co., Ltd.**

Internal Address: **19-16, Aoto, 4-chome, Katsushika-**

**ku, Tokyo, 125-8503 Japan**

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ ZIP: \_\_\_\_\_

Additional name(s) & address(es) attached? ☐ Yes ☒ No

4. Application number(s) or registration numbers(s):

If this document is being filed together with a new application, the execution date of the application is: **May 23, 2000**

A. Patent Application No.(s)

B. Patent No.(s)

Additional numbers attached? ☐ Yes ☒ No

5. Name and address of party to whom correspondence concerning document should be mailed:

Name: **Joseph W. Price**

Internal Address: **PRICE AND GESS**

Street Address: **2100 S.E. Main St., Ste. 25**

City: **Irvine** State: **CA** ZIP: **92614**

6. Total number of applications and patents involved: **1**

7. Total fee (37 CFR 3.41):.....\$ **40.00**

☒ Enclosed - Any excess or insufficiency should be credited or debited to deposit account

☐ Authorized to be charged to deposit account

8. Deposit account number:

**16-2462**

DO NOT USE THIS SPACE

9. Statement and signature.

*To the best of my knowledge and belief, the foregoing information is true and correct and any attached copy is a true copy of the original document.*

**Joseph W. Price**

Name of Person Signing

Signature

**November 29, 2000**

Date

Total number of pages including cover sheet, attachments, and document: **1**

## ASSIGNMENT

WHEREAS, I/~~we~~, Kazuo OHBA

(hereinafter "Assignor(s)"), citizen~~s~~ of Japan, have invented certain new and useful improvements in an Arm for elastic doll, method for molding same and mold therefor  
for which I/~~we~~ have executed application for Letters Patent of the United States, of even date herewith, and

WHEREAS, TAKARA CO., LTD.

hereinafter "Assignee"), a corporation of Japan, having a principal place of business at 19-16, Aoto 4-chome, Katsushika-ku, Tokyo 125-8503 Japan  
is desirous of obtaining the entire right, title and interest in, to and under the said improvements and the said application,

NOW, THEREFORE, in consideration of the sum of One Hundred Yen (¥100) to me/~~us~~ in hand paid, and other good and valuable consideration, the receipt of which is hereby acknowledged, I/~~we~~, the Assignor(s) have sold, assigned, transferred and set over, unto said Assignee, its successors, legal representatives and assigns, the entire right, title and interest in, to and under said improvements, and said application and all divisions, renewals and continuations thereof, and all Letters Patents of the United States, which may be granted thereon and all reissues and extensions thereof, and all priority rights under the International Convention for the Protection of Industrial Property for every country of the Union, and all applications for Letters Patents which may hereafter be filed for said improvements in any country or countries foreign to the United States, and all Letters Patents which may be granted for said improvements in any country or countries foreign to the United States, and any official of any country or countries foreign to the United States, whose duty it is to issue patents, on applications as aforesaid, to issue all Letters Patents for said improvements to said Assignee, its successors, legal representatives and assigns, in accordance with the terms of this instrument.

AND I/~~we~~, HEREBY covenant that I/~~we~~ have full right to convey the entire interest herein assigned, and that I/~~we~~ have not executed, and will not execute, any agreement in conflict herewith.

AND I/~~we~~ HEREBY further covenant and agree that I/~~we~~ will communicate to said Assignee, its successors, legal representatives and assigns, any facts known to me/~~us~~ respecting said improvements, and testify in any legal proceeding, sign all lawful papers, execute all divisional, continuing and reissue applications, make all rightful oaths and generally do everything

possible to aid said Assignee, its successors, legal representatives and assigns, to obtain and enforce proper patent protection for said improvements in all countries.

IN TESTIMONY WHEREOF, I hereunto set my hand this 23rd  
day of May, 2000.

KAZUO OHBA  
(Inventor) Kazuo OHBA

IN TESTIMONY WHEREOF, I hereunto set my hand this \_\_\_\_\_  
day of \_\_\_\_\_, 20\_\_.

\_\_\_\_\_  
(Inventor)

IN TESTIMONY WHEREOF, I hereunto set my hand this \_\_\_\_\_  
day of \_\_\_\_\_, 20\_\_.

\_\_\_\_\_  
(Inventor)

IN TESTIMONY WHEREOF, I hereunto set my hand this \_\_\_\_\_  
day of \_\_\_\_\_, 20\_\_.

\_\_\_\_\_  
(Inventor)

IN TESTIMONY WHEREOF, I hereunto set my hand this \_\_\_\_\_  
day of \_\_\_\_\_, 20\_\_.

\_\_\_\_\_  
(Inventor)

# ***PRICE AND GESS***

ATTORNEYS AT LAW

JOSEPH W. PRICE  
ALBIN H. GESS  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

OF COUNSEL  
JAMES F. KIRK

e-mail: [pgu@pgulaw.com](mailto:pgu@pgulaw.com)

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

Applicant(s):

Kazuo Ohba

Title:

ARM FOR ELASTIC DOLL, METHOD FOR MOLDING  
SAME AND MOLD THEREFOR

Attorney's  
Docket No.:

KAM1-BN12

**"EXPRESS MAIL" MAILING**  
**LABEL NO. EL227718351US**

**DATE OF DEPOSIT: November 29, 2000**

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

KAM1-BN12

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.

PCT/JP99/02980

INTERNATIONAL FILING DATE

May 10, 2000

PRIORITY DATE CLAIMED

May 10, 1999

TITLE OF INVENTION

ARM FOR ELASTIC DOLL, METHOD FORMOLDING SAME AND MOLD THEREFOR

APPLICANT(S) FOR DO/EO/US

Kazuo Ohba

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☐ Other items or information:

21. The following fees are submitted:

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :**

- |  |            |
|--|------------|
| <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... | \$1,000.00 |
| <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .....  | \$860.00   |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO .....  | \$710.00   |
| <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) .....   | \$690.00   |
| <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) .....   | \$100.00   |

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

**CALCULATIONS PTO USE ONLY**

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

**\$860.00**

**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	23 - 20 =	3	x \$18.00		<b>\$54.00</b>
Independent claims	6 - 3 =	3	x \$80.00		<b>\$240.00</b>
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>					<b>\$0.00</b>

**TOTAL OF ABOVE CALCULATIONS =**

**\$1,154.00**

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

**\$0.00**

**SUBTOTAL =**

**\$1,154.00**

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

**\$0.00**

**TOTAL NATIONAL FEE =**

**\$1,154.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☒

**\$40.00**

**TOTAL FEES ENCLOSED =**

**\$1,194.00**

Amount to be:	\$
refunded	
charged	\$

☒ A check in the amount of **\$1,194.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **16-2462** A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

**SEND ALL CORRESPONDENCE TO:**

Joseph W. Price, Reg. No. 25,124  
PRICE AND GESS  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614  
Tel: 949/261-8433  
Fax: 949/261-9071

SIGNATURE

Joseph W. Price

NAME

25,124

REGISTRATION NUMBER

November 29, 2000

DATE

*Exhibit D*

JOSEPH W. PRICE  
ALBIN H. GESS  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

OF COUNSEL  
JAMES F. KIRK

## **PRICE AND GESS**

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

e-mail: [pgu@pgulaw.com](mailto:pgu@pgulaw.com)

### **SPECIFICATION, CLAIMS, AND ABSTRACT** **THIRTY-FOUR (34) PAGES**

Applicant(s):

Kazuo Ohba

Title:

ARM FOR ELASTIC DOLL, METHOD FOR MOLDING  
SAME AND MOLD THEREFOR

Attorney's  
Docket No.:

KAM1-BN12

**"EXPRESS MAIL" MAILING**  
**LABEL NO. EL227718351US**

**DATE OF DEPOSIT: November 29, 2000**



## DESCRIPTION

### ARM FOR ELASTIC DOLL, METHOD FOR MOLDING SAME AND MOLD THEREFOR

#### Technical Field

This invention relates to an arm for an elastic doll, a method for molding the same and a mold therefor, and more particularly to an arm for an elastic doll formed by insert molding wherein a core is embedded in a molded article or arm in a predetermined manner, a method for molding the same and a mold therefor.

#### Background Art

In general, arms and legs for an elastic doll, when they are constructed so as to be kept bent, to thereby permit the doll to make a desired pose, so that it may exhibit increased reality. For this purpose, it has been conventionally considered that a core is preferably incorporated or embedded in the arms and legs. Actually, an arm or leg member which has a core incorporated or embedded therein is known in the art.

However, in such an arm having a core embedded or incorporated therein, as shown in Fig. 17, a core 40 is embedded in a molding synthetic resin material 41 for an arm as if it floats in the molding material, resulting it in failing to be integrated with the molding material 41. Thus, even when it is attempted to return the arm to an original straight pose thereof after it is bent in one direction, the core 40 selfishly carries out torsional rotation in the arm, to thereby cause the arm to make a pose of being bent in an opposite direction, resulting in the arm being hard to make a desired pose. Also, the conventional core- embedded arm has another problem of causing the core 40 to be exposed at a distal end 40a thereof from a surface of the arm.

Further, during forming of the arm by molding, the core

is required to be stationarily held at a predetermined position in a molding space defined in a mold. However, when a molding material is injected into the molding space, an injection pressure of the molding material causes movement of the core in the molding space, resulting in the core being displaced or deviated from a center of the arm molded.

Conventionally, techniques of stationarily setting the core in the molding space while keeping it floating in the space are limited to a means of fixing both ends of the core on edges of the molding space or that of securely supporting an intermediate portion of the core which is arranged in the molding space by means of a support member such as a fine wire or the like. However, the former means requires to cut the core at each end of the molded article, resulting in a mark made by the cutting being left on the molded article, as disclosed in Japanese Patent Publication No. 16875/1991. Thus, although the means may be employed in legs of a doll wherein there is a portion which is out of sight such as a sole of each of feet because the portion permits the mark to be ignored, it cannot be applied to arms because it is not desired to leave the marks on fingers. The latter means causes a mark formed by drawing the support member out of the molded article after the molding to be left in the form of a hole on a surface of the molded article although the hole is small, so that the molded article is deteriorated in appearance.

In order to solve the problems, techniques of fixing only one end of the core and rendering the other end of the core free would be considered. However, in order to stationarily hold the whole core by merely fixing only one end of the core, it is required to increase a whole size of a mold for molding the arm to rigidly fix the end of the core by means of a specific jig or the like, to thereby cause the techniques to be impractical. Also, an arm of a doll relatively reduced in size such as a dress-up doll is thin, so that, as shown in Fig. 18, a bit of

movement of a core 50 during a molding operation possibly causes the core 50 to be shifted or deviated from a central position of a molded article or arm 51, so that the core may be often dangerously exposed. Therefore, the techniques are considered to be inapplicable to insert molding of a doll arm. Thus, in the prior art, a doll arm reduced in size is typically formed by slush molding. Unfortunately, slush molding causes a cavity to be formed in the arm, resulting in the arm having a touch different from that of a leg having a core embedded therein by insert molding, so that the arm gives a user an unbalanced and unnatural feeling or impression.

The present invention has been made so as to eliminate the foregoing disadvantage or problem of the prior art. Accordingly, it is an object of the present invention to provide an arm for an elastic doll which is capable of substantially preventing torsional rotation of a core in the arm.

It is another object of the present invention to provide a method for forming an arm for an elastic doll which is capable of stably holding a core at a predetermined position in the arm during a molding operation.

It is a further object of the present invention to provide a mold for forming of an arm for an elastic doll, which mold is capable of stably holding a core at a predetermined position in the arm during a molding operation while being simplified in structure.

#### Disclosure of Invention

In order to solve the above-described problems of the prior art, in accordance with one aspect of the present invention, an arm for an elastic doll, which arm is formed of a molding material by molding is provided. The arm is characterized in that a core made of metal is arranged in the arm, the core being provided on a distal end thereof or a portion thereof positioned in proximity to the distal end with a spacer

having a sectional area smaller than that of the arm, the spacer being made of a material compatible with the molding material for the arm.

It is preferable that the spacer be provided on a periphery thereof with tapered projections.

It is preferable that the core be formed thereon with a detachment-preventing section for preventing detachment of the spacer therefrom.

It is preferable that the core be formed at the distal end thereof with a bent section and the spacer be formed with an engagement hole in which the bent section is engagedly fitted.

In accordance with another aspect of the present invention, a method for molding an arm for an elastic doll is provided. The method includes the steps of forming a molding space for molding a portion of the arm extending from a shoulder thereof to a hand thereof in a mold and arranging a metal core in the molding space so as to extend along a center of the molding space. The core is fixed at one end thereof in a proximal section of the molding space which corresponds to a proximal portion of the shoulder of the arm and the core is provided at the other end thereof or a portion thereof positioned in proximity to the other end with a spacer for keeping the core spaced at a predetermined interval from an inner surface of the molding space. The method also includes the step of injecting a molten molding material into the molding space. The spacer is made of a synthetic resin material which is compatible with the molding material and has a melting point equal to or below a molding temperature of the molding material.

Also, in accordance with this aspect of the present invention, a method for molding arms for an elastic doll is provided. The method includes the step of forming a pair of molding spaces for molding portions of the arms each extending from a shoulder of the arm to a hand thereof in a mold including mold members. The molding spaces are formed opposite to each

other to permit proximal sections thereof which respectively correspond to proximal portions of the shoulders of the arms to face each other. The method also includes the step of arranging a metal core in the molding spaces so as to continuously extend  
5 along a center of the molding spaces. The core is provided at each of ends thereof or a portion thereof positioned in proximity to the end with a spacer for keeping the core spaced at a predetermined interval from an inner surface of the molding spaces. The method further includes the step of injecting a  
10 molten molding material into the molding spaces. The core is formed at a portion thereof positioned between the molding spaces with a bent section. The mold members have respective mating surfaces, one of which is formed thereon with projections engaged with the bent section of the core and opposite sides of the core  
15 to stationarily hold the core. The spacer is made of a synthetic resin material which is compatible with the molding material and has a melting point equal to or below a molding temperature of the molding material.

In accordance with this aspect of the present invention,  
20 a method for molding arms for an elastic doll is also provided. The method includes the step of forming a pair of molding spaces for molding portions of the arms each extending from a shoulder of the arm to a hand thereof in a mold including mold members. The molding spaces are formed opposite to each other to permit  
25 proximal sections thereof which respectively correspond to proximal portions of the shoulders of the arms to face each other. The method also includes the steps of arranging a metal core in the molding spaces so as to continuously extend along a center of the molding spaces while keeping both side portions of  
30 the core respectively projected into the molding spaces, joining the mold members of the mold to each other so as to hold the core fixed on mating surfaces of the mold members to keep both sides of the core floated in the molding spaces. The method further includes the step of injecting a molten molding material into the

molding spaces.

Further, in accordance with this aspect of the present invention, a method for molding an arm for an elastic doll is provided. The method includes the step of forming a molding space for molding a portion of the arm extending from a shoulder of the arm to a hand thereof in a mold. The shoulder of the arm is provided with an engagement groove adapted to be engaged with a trunk of a doll. The method also includes the steps of arranging a metal core in the molding space so as to extend along a center of the molding space and holding the core at a predetermined position in the molding space by a holding means. The method further includes the step of arranging a support rod at a site in the molding space corresponding to the engagement groove. The support rod functions to support the core against an injection pressure of a molding material during molding of the arm. The method includes the step of injecting the molten molding material melted into the molding space.

It is preferable that the shoulder of the arm be provided with an engagement groove adapted to be engaged with a trunk of a doll. The method further includes the step of arranging a support rod at a site in the molding space corresponding to the engagement groove. The support rod functions to support the core against an injection pressure of a molding material during molding of the arm.

It is preferable that the method further include the steps of separating the mold members from each other after molding of the arms and removing a portion of the core exposed from the shoulder of each of the arms.

In accordance with a further aspect of the present invention, a mold for insert molding of arms for an elastic doll is provided. The mold includes first and second split mold members, which are formed therein with molding spaces each having a configuration corresponding to a configuration of a portion of each of the arms extending from a shoulder of the arm to a hand

thereof, respectively. The molding spaces of the first and second split mold members are formed opposite to each other while being spaced at an interval from each other to permit proximal sections thereof which respectively correspond to proximal portions of the shoulders of the arms to face each other. The first and second split mold members have mating surfaces. The mold also includes a fixing means for fixing a metal core for connecting both arms to each other. The fixing means is formed on the mating surfaces between the molding spaces.

It is preferable that the fixing means be constituted by a recess for receiving the core therein and constructed so as to fix the core at three points.

It is preferable that the core have a bent section arranged between the molding spaces of each of the first and second split mold members, and the fixing means include a projection provided on one of the first and second split mold members so as to be engaged with the bent section of the core.

It is preferable that the fixing means further include a pair of second projections arranged at each of a plurality of positions on the one of the first and second split mold members, wherein each pair of the second projections are arranged to interposingly hold opposite sides of the core therebetween.

It is preferable that each of the arms be provided at the shoulder thereof with an engagement groove adapted to be engaged with a trunk of a doll, and the mold further include a support rod for supporting the core against an injection pressure of a molding material during molding of the arms, wherein the support rod is arranged at a site in each of the molding spaces corresponding to the engagement groove.

It is preferable that the mating surface of one of the first and second split mold members be provided thereon with a temporary holding means for temporarily holding the core thereon.

It is preferable that the mold further include a pin

member for forcing out the core from the molding spaces after molding of the arms, which pin member is arranged so as to be permitted to retractably project from the mating surface of one of the first and second split mold members.

5

#### Brief Description of Drawings

10 Figs. 1A and 1B each show a mold for insert molding which is used for forming an arm for an elastic doll according to the present invention by way of example, wherein Fig. 1A is a plan view showing one of split mold members and Fig. 1B is a side elevation view in section showing the mold;

Fig. 2 is a perspective view showing an end of a core having a spacer mounted thereon;

15 Fig. 3 is a sectional view showing a portion of the mold having the spacer arranged therein;

Figs. 4A to 4C are sectional views each showing a detachment preventing section for preventing detachment of the spacer from the core;

20 Fig. 5 is a front elevation view showing an embodiment of an arm for an elastic doll according to the present invention;

Fig. 6 is a plan view showing one of split mold members of a mold for insert molding which is used in another embodiment of a molding method according to the present invention;

25 Fig. 7 is a fragmentary enlarged plan view of the split mold member shown in Fig. 6;

Fig. 8A is a side elevation view in section showing the mold of Fig. 6 which is kept closed;

Fig. 8B is a fragmentary enlarged sectional view showing a core fixing section of the mold of Fig. 8A closed;

30 Fig. 9 is a front elevation view showing an article formed by molding using the mold shown in Fig. 6;

Fig. 10 is a plan view showing one of split mold members in which a core is fixed in another manner;

Fig. 11 is a front elevation view showing another example



of a core which is constituted by a metal core member and spacers;

Fig. 12 is an enlarged exploded perspective view showing a part of the core of Fig. 11;

Fig. 13 is an enlarged vertical sectional view of the core member and spacer shown in Fig. 11;

Fig. 14 is a perspective view showing a mold for molding arms for an elastic doll according to the present invention;

Fig. 15 is a perspective view of the mold shown in Fig. 14 which has a core set therein;

Fig. 16A is a schematic view showing an article as molded by the mold of Fig. 14;

Fig. 16B is a schematic view of the molded article shown in Fig. 16A from which an excessive portion of the core is removed by cutting;

Fig. 17 is a schematic view showing a core incorporated in a conventional molded article; and

Fig. 18 is a schematic view showing a core incorporated in another conventional molded article.

#### Best Modes for Carrying Out Invention

Now, the present invention will be described in connection with embodiments thereof with reference to the accompanying drawings.

Referring first to Figs. 1A to 5, an embodiment of each of an arm for an elastic doll and a method for forming the same according to the present invention are illustrated. Figs. 1A and 1B show a mold for insert molding which is used for molding an arm for an elastic doll according to the present invention by way of example.

A mold generally designated by reference numeral 1 includes split mold members 2 and 3 separatably joinable to each other. The mold members 2 and 3 are formed therein with a molding space 4a and a molding space 4b so as to form a pair in

cooperation with each other, respectively. The molding spaces 4a and 4b are formed so as to be substantially symmetric and constructed so as to cooperate with each other to form an arm therein by molding. The mold members 2 and 3 are matedly joined to each other, so that a molten synthetic resin material is injected into the mold 1 through an injection port 6 of the mold 1, resulting in an arm being formed by molding.

The mold 1 is formed with a gate section 9 in a manner to be contiguous to the injection port 6. Also, the gate section 9 is formed so as to be open to a portion of each of the molding spaces 4a and 4b which corresponds to a shoulder of the arm to be molded. Such arrangement of the injection port 6 and gate section 9 permits resin fed through the injection port 6 to be injected from the gate section 9 into the molding spaces 4a and 4b.

The split mold members 2 and 3 have mating surfaces defined at a position thereof between the molding spaces 4a and 4b, respectively. The mating surfaces are each formed with a recess 5a. The recesses 5a cooperate with each other to act as a fixing means for stationarily holding one end 10a of a metal core 10 projected from the molding spaces 4a and 4b therein. For this purpose, the recesses 5a are formed to have a size which permits the core 10 to be closely fitted therein. Thus, when the mold member 2 is jointed to the mold member 3, the one end 10a of the core 10 which is positioned on the mold member 2 is fitted in the recesses 5a of the mold members 2 and 3 while being pressedly held therebetween.

Now, molding of an arm for an elastic doll by means of the mold 1 constructed as described above will be described. First, the metal core 10 is arranged on the mold member 2. The core 10 is made of metal such as iron or the like and has a spacer 13 provided on a portion thereof in proximity to a distal end 10b thereof, as shown in Fig. 2. The spacer 13 is made of a resin material and formed to have a cannonball-like shape. The

spacer 13 is formed at a central portion thereof with a hole 14 into which the distal end 10b of the core 10 is inserted. Also, the spacer 13 is formed on a peripheral surface thereof with a plurality of tapered projections 15 in a manner to extend therefrom in a radial direction perpendicular to the hole 14. The projections 15 are each preferably formed at a distal end thereof to have a diameter of about 0.1 mm to 1 mm. The core 10, as shown in Fig. 4A, is formed at the distal end thereof with detachment-preventing sections 18 which act to prevent the spacer 13 from being detached from the core 10. A plurality of such detachment-preventing sections 18 are preferably arranged at predetermined intervals on a peripheral surface of the core 10, to thereby act also as a rotation-preventing means which prevents the spacer 13 from rotating around the core 10. The detachment-preventing section 18 may be formed to have a frust-conical shape as shown in Fig. 4B. Alternatively, the detachment-preventing section 18 may be configured so as to project from the spacer 13 as shown in Fig. 4C. Further, the detachment-preventing section and the rotation-preventing means may be formed separately.

The spacer 13 is made of a synthetic resin material which is compatible with the molding material injected into the molding spaces 4a and 4b and has a melting point equal to or below a molding temperature of the molding material injected into the molding spaces 4a and 4b. For example, in the illustrated embodiment, the molding material injected into the molding spaces 4a and 4b may be a thermoplastic elastomer which has a melting point of between 100°C and 170°C, whereas the spacer 13 may be made of polyethylene which has a melting point between 100°C and 130°C. A temperature difference between a molding temperature of the molding material and a melting point of the spacer may be between 0°C and 100°C. Alternatively, the spacer 13 may be made of soft or flexible synthetic resin such as an elastomer, a material designated by Everflex (trademark), PVC or the like which is of the same type as the molding material. Of course, a

variety of elastomers such as an olefin elastomer, an urethane elastomer and the like may each be used as the molding material. A different molding material and a different material for the spacer may be used. It is of course that this leads to a variation in the molding temperature and melting point.

Then, when the mold member 3 is superposed on the mold member 2 alignedly or while being aligned with each other, the one end 10a of the core 10 is closely fitted in the recesses 5a of the mold members 2 and 3, so that the core 10 may be stationarily held at a center in the molding spaces 4a and 4b. Also, the other end 10b of the core 10 is likewise held at a center in the molding spaces 4a and 4b because the projections 15 are abutted at a distal end thereof against an inner surface of the molding spaces 4a and 4b (see Fig. 3).

Then, molten resin 16 is injected through the injection port 6 (Fig. 1A) into the molding spaces 4a and 4b. The resin is injected from the gate section 9, so that the molding spaces 4a and 4b may be filled with the resin. At this time, the core 10 has a pressure under which the resin is injected applied thereto in various directions. However, the core 10 is stably held in the molding spaces 4a and 4b because the one end 10a of the core 10 is firmly held in the recesses 5a of the mold members 2 and 3 and the other end 10b of the core 10 is held in the molding spaces 4a and 4b while being spaced at a predetermined interval from the inner surface of the molding spaces 4a and 4b by the spacer 13. This permits the core 10 to be firmly held at a predetermined position in the molding spaces without moving therein during the molding operation.

After the molding material is thus filled in the molding spaces 4a and 4b, the mold member 2 is separated from the mold member 3, resulting in such a molded article or arm 17A as shown in Fig. 5 being removed therefrom.

The material for the spacer 13 has a melting point equal to or below a molding temperature of the molding material, so

that injection of the molding material into the molding spaces permits the spacer 13 to be melted gradually from the projections 15. However, the spacer 13 is prevented from being instantaneously increased in temperature to a melting point thereof. Melting of the spacer 13 is started after the molding spaces 4a and 4b are filled with the molding material. Thus, the spacer 13 sufficiently prevents the core 10 from moving during the molding and starts to be melted by the molding material after the molding material is filled in the molding spaces 4a and 4b. Further, the spacer 13 is compatible with the molding material, so that both may be integrally combined together. The projections 15 are each tapered at the distal end thereof, so that the distal end of each of the projections 15 may be rapidly melted, to thereby be integral with the molding material. This, when the molded arm 17A is removed from the mold members 2 and 3, prevents the distal end of each of the projections 15 from being exposed or causing a surface of the molded arm 17A to give an observer or user an unnatural or strange feeling or impression.

Also, the molded article 17A thus obtained permits the core 10 to extend at the one end 10a thereof to a shoulder of the arm and to be integrated at the other end 10b thereof with the spacer 13 by melting; so that torsional rotation of the core 10 with respect to the spacer 13 may be substantially prevented even when the molded article 17A is repeatedly bent at an elbow joint. In addition, the detachment-preventing section or sections 18 effectively prevent the core 10 from being detached from the spacer 13, not to be externally exposed, resulting it in ensuring that a user safely enjoys the doll. Further, the detachment-preventing section or sections 18 permit the core 10 and spacer 13 to be integrated with each other, to thereby more effectively prevent torsional rotation of the core 10 with respect to the spacer 13, so that the arm 17A may be readily formed into any desired configuration. When the detachment-preventing section or sections 18 are constructed so as to act also as the rotation-

preventing means, integration between the core 10 and spacer 13 may be further enhanced.

The term "compatible" used herein means not only properties that the molding material and the material for the spacer are fully melted together, to thereby be integral with each other, but properties that both are partially melted together to a degree sufficient to exhibit some integrity.

Further, it is not necessarily required that the spacer be provided at the distal end of the core. It may be arranged in proximity to the distal end.

Referring now to Figs. 6 to 9, a method for molding a pair of left and right arms for an elastic doll is illustrated. A mold 1 used in the method is splittable into mold members 2 and 3. One mold member 2, as shown in Fig. 6, is formed therein with a pair of molding spaces 4a each constructed so as to permit a portion of each of arms for an elastic doll extending between a shoulder of the arm and a hand thereof to be molded therein. The molding spaces 4a and 4a are arranged opposite to each other while keeping proximal sections thereof which correspond to proximal portions of the shoulders of the arms facing each other. Gate sections 9 through which a molding material is injected into the molding spaces 4a and 4a are each formed at a site 22 in a respective one of the molding spaces 4a and 4a corresponding to an expanded projection formed at a proximal end of the shoulder of each of the arms.

For molding the arms, a core 10 made of metal and formed to have a laterally symmetric configuration is arranged in the molding spaces 4a and 4a in a manner to extend along a center of the molding spaces 4a and 4a. The core 10 is provided at both ends 10b and 10b thereof or portions thereof in proximity thereto with spacers 13 for holding the core 10 so as to keep it spaced at a predetermined interval from an inner surface of each of the molding spaces 4a and 4a. The core 10 is formed at a portion thereof positioned between the molding spaces 4a and 4a with a

bent section 19. The spacer 13 is made of a synthetic resin material which is compatible with a molding material and has a melting point equal to or below a molding temperature of the molding material as in the embodiment described above. The core 10 is provided with detachment-preventing sections in substantially the same manner as shown in Figs. 2 and 4A to 4C.

The mold member 2 has a mating surface having a first projection 20 and two pairs of second projections 21 and 21 formed thereon so as to act as a fixing means for fixing the core 10 between the molding spaces 4a and 4a. The first projection 20 arranged at a central position between the molding spaces 4a and 4a is formed to have a size which permits the projection to be engagedly fitted in the bent section 19 of the core 10. Each pair of the second projections 21 and 21 arranged on each of both sides of the first projection 20 are positioned so as to be engaged with the core 10 on both sides of the core 10 opposite to each other while interposing the core 10 therebetween. Engagement of the central first projection 20 with the bent section 19 of the core 10 prevents the core 10 from moving in directions indicated at arrows P in Fig. 6 and the second projections 21 and 21 on both sides prevent the core 10 from moving in directions indicated at arrows Q. Also, the central bent section 19 of the core 10 prevents the core 10 from rotating in directions of arrows R in Fig. 6. This results in the core 10 being fixedly held at a predetermined position in the mold 1.

Also, the molding spaces 4a each have a site 23 arranged in correspondence to an engagement groove of the shoulder of each of the arms. The molding spaces 4a are each provided at a portion thereof somewhat below a center of the site 23 with a support rod 24 for supporting the core 10 in a drawable manner, as best seen in Fig. 7.

After the core 10 is fixedly arranged in the mold member 2, the mold members 2 and 3 are joined together as shown in Fig. 8A. At this time, the second projections 21 and 21 and the core

10 are joined to or engaged with each other as shown in Fig. 8B. (Engagement between the core 10 and the first projection 20 is carried out in substantially the same manner.) Then, a molding material (molten resin) 16 is injected from an injection port 6  
5 into the molding spaces 4 in substantially the same way as in the embodiment described above. An injection pressure of the molding material is applied directly to a section of the core 10 corresponding to a shoulder of each of arms to be molded, to thereby be increased, so that the core 10 is downwardly forced on  
10 the plane of each of Figs. 6 and 7. In this instance, the core 10 is supported from the side opposite to the direction of injection or upwardly by the support rod 24, resulting in stability of the core 10 being further enhanced. Likewise, the injection pressure of the resin is applied to the core 10 in the  
15 molding spaces 4 in various directions. However, a central region of a portion of the core 10 outwardly projected from the molding spaces 4 is firmly held by the first and second projections 20 and 21 arranged on the mating surfaces of the mold members 2 and 3. Also, the ends 10b of the core 10 are held by  
20 the spacers 13 so as to be spaced at a predetermined interval from the inner surface of the molding spaces 4, so that the whole core 10 may be stably supported without moving in the molding spaces 4.

After the molding material is charged into the molding  
25 spaces, the mold members 2 and 3 are separated from each other and the support rods 24 is drawn out of the molding spaces 4, so that molded articles (arms) 17B may be taken out of the mold members 2 and 3. The core 10 is removed at an exposed portion 10A thereof by cutting. The molded article 17B is formed at an  
30 engagement groove 25 with a hole 26 by drawing out the support rod 24 from the molded article. The engagement groove 25 is adapted to be engagedly fitted in a hole (not shown) on a side of a trunk of a doll together with an expanded projection 27. This keeps the hole 26 from being externally exposed when the molded



arm is attached to the trunk, to thereby prevent a deterioration in appearance of the arms and therefore the doll.

In the method of the illustrated embodiment, the material for the spacers 13 has a melting point equal to or below a molding temperature of the molding material and compatible with the molding material, so that both may be rendered integral with each other. This prevents the projections 15 from being exposed at the distal end thereof from a surface of the molded article or arm 17B and the distal end of each of the projections 15 from giving a user an unnatural or strange feeling or impression. Also, when the spacer 13 is kept fixed on the core 10, the core 10 is integrated with the spacer 13 and a skin/flesh member constituted by the molding material, so that repeating of bending of the molded article or arm 17B does not cause torsional rotation of the core 10. This permits the molded arm to be formed to have any desired configuration and prevents the core 10 from being detached from the spacer 13, to thereby be externally exposed, resulting in it ensuring that a user may safely enjoy the doll.

The support rods 24 function to prevent the core 10 from being moved by an injection pressure of the molding material. Thus, it is not necessarily required that the support rods 24 be arranged together with the first and second projections 20 and 21 and the spacers 13 as described above. Also, it is merely required that the core 10 be held at a predetermined position in the molding spaces 4 using any suitable means. Likewise, when the core 10 is held by a combination of the first and second projections 20 and 21 with the spacers 13, the support rods 24 are not necessarily required. Nevertheless, arrangement of the support rods 24 ensures more effective holding of the metal core 10 in the molding spaces.

Referring now to Fig. 10, a modification of a fixing means for securely holding the core 10 in the molding spaces is illustrated. The modification may be so constructed that a core

10 is provided with a plurality of bent sections 19 and correspondingly a mold member 2 is provided with a plurality of first projections 20. The bent portions 19 are each not necessarily limited to an arcuate configuration as shown in Fig. 10. For example, the bent portions 19 may each be formed to have any other suitable configuration such as a shape as shown in Fig. 11 described hereinafter, a V-shape, a U-shape, a sharp-cornered U-shape or the like.

Referring now to Figs. 11 to 13, another modification of the core and spacers is illustrated. A core 10 of the illustrated modification is made of metal and formed at a central portion thereof with a bent section 19 of a modified V-shape which permits a front side of the core and a rear side thereof to be readily discriminated from each other. Also, the core 10 is provided on each of both distal ends thereof with a bent section 28 of an arcuate shape, as shown in Figs. 12 and 13. Alternatively, the bent sections 28 may each be formed to have a V-shape, a sharp-cornered U-shape or the like.

The spacers 13, as shown in Figs. 12 and 13, are each formed to have a substantially cylindrical or columnar shape. Also, the spacer 13 is formed with a groove 29 which has a width substantially equal to a diameter of the core 10 and is open to a front side surface of the spacer 13, a rear side surface thereof and an upper surface thereof, so that the spacer 13 may include a front lower wall 30 positioned below the groove 29 and a rear upper wall 31 positioned behind the groove 29. The front lower wall 30 of the spacer 13 is formed with an engagement hole 33. Also, the groove 29 is formed to be open to the rear side surface of the spacer in a manner to permit the rear upper wall 31 to be divided into an upper section 31a and a lower section 31b vertically spaced from each other. The groove 29 is provided on each of both lateral inner surfaces thereof with a projection 32 of a triangular shape in section. An interval between both projections 32 is defined to be smaller than a diameter of the

core 10. Also, the spacer 13 is provided on an outer peripheral surface thereof with four projections 15 in a manner to radially extend therefrom. Thus, the projections 15 include two front and rear projections opposite to each other and two lateral projections opposite to each other. The projections 15 are not arranged at the same level or height on the peripheral surface. However, the projections 15 permit the spacer 13 in the illustrated modification to exhibit the same interval holding function as the spacer 13 described above with reference to Fig. 2. Also, the front and rear projections 15 are positioned on a diagonal line, to thereby prevent the core 10 from moving back and forth in the mold.

Mounting of the thus-constructed spacer 13 on each of the distal ends of the core 10 is carried out by inserting the bent section 28 formed at the distal end of the core 10 into the groove 29 from a front side of the groove 29 and then rotating the spacer 13 to engagedly fit a distal end of the bent section 28 in the engagement hole 33 of the front lower wall 30 and abut a portion of the core 10 above the bent section 28 against the rear upper wall 31 beyond the projections 32.

After the spacer 13 is thus mounted on the core 10, the distal end of the bent section 28 of the core 10 is kept fitted in the engagement hole 33, to thereby substantially prevent the core 10 from being detached from the spacer 13. Also, a straight portion of the core 10 right above the bent section 28 is held between the rear upper wall 31 of the spacer 13 and the projections 32, to thereby substantially prevent or restrain the spacer 13 from rotating in a direction opposite to that in which the spacer 13 is mounted on the core 10. This prevents the spacer 13 from being detached from the core 10 due to application of an injection pressure of the molding material to the core 10 during a molding operation.

The core 10 of the illustrated modification constructed as described above is bent at the distal end thereof as indicated

by reference numeral 28. Such arrangement of the bent section 28 at the distal end effectively restrains the distal end of the core 10 from being projected from the molding material after molding of the arm. Even if it is projected therefrom, it is highly safe to the human body as compared with the case that the distal end is straightly projected.

Also, the spacer 13 is formed with the groove and holes, to thereby be highly increased in surface area. This permits an increase in contact surface between the molding material and the spacer 13 when the molding material is injected into the molding space during the molding operation, so that both may be melted with each other, to thereby be readily integrated with each other.

Referring now to Figs. 14 to 16B, another embodiment of a method for molding arms for an elastic doll according to the present invention and a mold used in the method are illustrated. In Fig. 14, reference numeral 1 designates a mold for insert molding (hereinafter referred to as "mold"). The mold is used for molding arms for an elastic doll.

The mold 1 is constituted by first and second split mold members or a fixed mold member 2 and a movable mold member 3. The fixed mold member 2 is symmetrically formed with a pair of molding spaces 4a and 4a and correspondingly the movable mold member 3 is symmetrically formed with a pair of molding spaces 4b and 4b. The fixed mold member 2 and movable mold member 3 are joined to each other and then a molten synthetic resin material is injected through an injection port 6 into the molding spaces, to thereby form arms. The molding spaces 4a and 4a are so formed that proximal sections thereof corresponding to proximal portions of the arms are arranged opposite to each other while being spaced at a predetermined interval from each other. This is likewise true of the molding spaces 4b and 4b.

The fixed mold member 2 and movable mold member 3 have mating surfaces which are formed thereon with grooves 5a and 5b

of a substantially V-shape between the molding spaces 4a and between the molding spaces 4b, respectively. The grooves 5a and 5b each act as a fixing means for fixing a fixed portion 10A of a central region of a metal core 10 projected from the molding spaces 4a, 4a and 4b, 4b. For this purpose, the grooves 5a and 5b are each formed to have a size which permits the core 10 to be closely or tightly fitted therein; so that when the movable mold member 3 is joined to the fixed mold member 2, the core 10 positioned on the fixed mold member 2 may be received in the grooves 5a and 5b, to thereby be firmly held between the fixed mold member 2 and the movable mold member 3.

The fixed mold member 2 is formed thereon with a plurality of pairs of temporary holding projections 21, which are arranged along the groove 5a and in proximity thereto. Also, each pair of the temporary holding projections 21 are arranged in a manner to interpose the groove 5a. The temporary holding projections 21 function to temporarily hold the metal core 10 which is kept fitted in the groove 5a of the fixed mold member 2. The movable mold member 3 is provided thereon with recesses 21a in a manner to positionally correspond to the temporary holding projections 21.

Also, the fixed mold member 2 is provided on the mating surface thereof with pin members 12 in a manner to be projectable and retractable with respect to the groove 5a. The pin members 12 function to force out the metal core 10 therefrom after molding of the arms. In Figs. 14 and 15, reference numeral 7 designates a sprue section, 8 is a runner section and 9 is a gate section.

Now, molding of arms for an elastic doll by the mold 1 of the illustrated embodiment thus constructed will be described. First, the metal core 10 for both arms is arranged on the fixed mold member 2. The core 10 is made of metal such as iron or the like and formed so as to project into both molding spaces 4a and 4a. Also, the core 10, as described above, has the central fixed

portion 10A bent into a V-shape. The fixed portion 10A of the core 10, as shown in Fig. 15, is inserted between the temporary holding projections 21 of the fixed mold member 2 and fitted in the groove 5a, to thereby be temporarily held on the fixed mold member 2. This permits the both sides of the core 10 to be held at a central portion in the molding spaces 4a while horizontally extending therein. The core 10 is formed to have a length which prevents distal ends 10b of the core 10 from excessively approaching inner surfaces of the molding spaces 4a and 4a. The distal ends 10b of the core 10 may be folded back.

Then, the movable mold member 3 is joined to the fixed mold member 2 in a manner to be superposed thereon, so that the fixed portion 10A of the core 10 is closely fitted in the grooves 5a and 5b of the fixed mold member 2 and movable mold member 3. In this instance, the core 10 is prevented from being rotated about the fixed portion 10A because the fixed portion 10A of the core 10 is formed to have a V-shape. This permits the core 10 to be horizontally firmly held in the mold.

Then, a molten synthetic resin material is injected through the injection port 6 into the molding spaces 4a and 4b. The resin is fed through the sprue section 7 and runner section 8 and then injected from the gate section 9 into the molding spaces 4a and 4b. This permits the molding spaces 4a and 4b to be filled with the resin. At this time, the core 10 has an injection pressure of the resin applied thereto in various directions. However, the fixed portion 10A of the core 10 is firmly held or fixed as described above, resulting in the core 10 being prevented from moving in the molding spaces 4a and 4b. The synthetic resin material is soft or flexible synthetic resin such as an elastomer, a material designated by Everflex (trademark), PVC or the like.

After the molding spaces 4a and 4b are thus filled with the resin material, the movable mold member 3 is separated from the fixed mold member 2 and then the pin members 12 are projected

therefrom, resulting in the core 10 being forced out of the fixed mold member 2 and concurrently molded articles or molded arms 17C and 17C being removed therefrom while being connected with each other through the core 10, as shown in Fig. 16A. After the removal is thus carried out, the central portion 10A of the core (a portion of the core exposed from the molded articles) which is unnecessary is cleared from the molded articles by cutting, resulting in the molded arms 17C and 17C being separated from each other.

The molded arms 17C each have the core 10 necessarily kept embedded therein while being arranged at a central position therein, resulting in production of a defective in which the core is shifted or deviated from the central position in the molded article being minimized, so that yields in the manufacturing may be improved. The molded arms each have the core 10 embedded therein, to thereby be kept bent once it is bent, resulting in it exhibiting good reality and ensuring safety during handling thereof because the core is fixed at a central position therein.

The fixed portion 10A of the core 10 is merely required to be supported at at least three points on the mating surfaces of the fixed mold member 2 and movable mold member 3. Thus, the grooves 5a and 5b are each merely required to be so formed that portions S and T thereof positioned in proximity to the molding spaces 4a, 4b and a central bent portion U thereof may be tightly contacted with the core 10. The remaining part of each of the grooves 5a and 5b may be formed so as to permit the core 10 to be loosely fitted therein.

In relation to the above, the fixing means is not limited to a structure in the form of a groove like the grooves 5a and 5b. For example, the fixing means may be constructed in such a manner that the mating surface of each of the fixed mold member 2 and movable mold member 3 is formed with recesses, in which projections (not shown) for supporting the core at three points are arranged.

Also, in the illustrated embodiment, the molding spaces in the mold are formed to be identical and symmetric with each other. However, the molding spaces are not necessarily required to be identical with each other. Also, the fixed section 10A of the core 10 is not limited to a V-shape. It may be formed to have any other suitable shape such as a U-shape, a W-shape or the like.

As can be seen from the foregoing, the arm for an elastic doll of the present invention is so constructed that the metal core is provided at the distal end thereof with the spacer having a sectional area smaller than that of the arm. Such construction permits the core to be arranged at a central position in the arm and prevents torsional rotation of the core in the arm and external exposure of the spacer. Also, the spacer is made of a material which is compatible with the molding material for the arm, so that both materials may be integrated with each other during molding of the arm. This prevents the molded arm from giving a user an abnormal or unnatural feeling or impression when the user touches it, resulting in it giving a natural touch.

In one embodiment of the present invention, as described above, the spacer is provided on the peripheral surface thereof with the tapered projections. Such construction facilitates not only flowing of the molding material in the molding spaces during the molding operation but melting of the projections on the spacer.

Also, in one embodiment of the present invention, the core is provided with the detachment-preventing element for the spacer. Such construction permits the core and spacer to be rendered integral with each other, resulting in torsional rotation of the core with respect to the spacer being substantially prevented, so that the molded arm may take a desired configuration and ensure safety in handling thereof.

In one embodiment of the present invention, the core is bent at the distal end, to thereby minimize projection of the



core from the molding material after molding of the arm. Also, it is highly increased in safety as compared with a core that a distal end thereof is formed to be straight, even if it is outwardly projected from the molding material. The spacer is formed with the engagement hole in which the bent section of the core is engagedly fitted, to thereby be highly increased in surface area. Such construction permits a contact surface between the molding material and the spacer to be increased when the molding material is injected into the molding spaces during the molding operation, so that the material for the spacer and the molding material may be melted together, to thereby be readily integrated with each other. Further, the distal end of the core is bent, to thereby prevent the spacer from being detached from the core by an injection pressure of the molding material applied thereto during the molding operation.

In the method for molding an arm for an elastic doll according to the present invention, the metal core is fixed at one end thereof on the proximal section of the molding space in the mold which correspond to the proximal portion of the shoulder of the arm. Also, the core is so arranged that the other end thereof or the portion thereof in proximity to the other end is kept spaced at a predetermined interval from the inner surface of the molding space. Such construction permits the core to be held at a predetermined position in the molding space while preventing the core from moving during the molding operation. Also, the material for the spacer is synthetic resin which is compatible with the molding material and has a melting point equal to or below a molding temperature of the molding material. This permits both materials to be integrated with each other, to thereby prevent the projections on the spacer from being exposed at the distal end thereof from a surface of the molded article and the distal end of each of the projections from giving a user an unnatural or strange feeling or impression. Also, the molded arm is solid and free from any cavity and has the same touch as

that of a leg member having the core embedded therein, to thereby be prevented from giving a user an abnormal or strange feeling or impression. Further, the arm as well as a leg may be made by insert molding, to thereby eliminate imbalance or difference in texture or touch between the arm and the leg.

In the method for molding arms for an elastic doll according to the present invention, a pair of left and right arms can be concurrently molded. Also, in the method, the single continuous core is arranged in a pair of the molding spaces, so that the core including the bent section may be securely held by the projections of the mold formed between the molding spaces. This permits a portion of the core positioned on a shoulder side of each of the arms to be stationarily held and an end of the core on a hand side of the arm to be held at a predetermined position in the molding spaces by the spacer, so that the arms for an elastic doll in which the core is kept from being deviated may be molded. Further, the core is removed at an exposed portion thereof after the molding operation, so that the arms for an elastic doll which have the core appropriately embedded therein and exhibit stable quality may be manufactured.

In the method for molding an arm for an elastic doll according to the present invention, molding is carried out while the metal core is positively and firmly held to keep both sides of the core floated in the molding spaces. The core for a pair of arms is constituted by a single core, to thereby obviate the necessity of supporting a plurality of cores in the respective molding spaces, resulting in production efficiency being increased.

In the method for molding an arm for an elastic doll according to the present invention, the holding means is arranged so as to hold the metal core along a center in the molding space and the support rod for supporting the core against an injection pressure of the molding material during the molding operation is arranged at the site in the molding space corresponding to the

engagement groove provided at the shoulder of the arm. Thus, when the molding material is injected through the site in the molding space corresponding to the shoulder of the arm into the molding space, an injection pressure of the molding material is initially substantially applied to a portion of the core positionally corresponding to the shoulder. However, the core is supported by the support rod on a side opposite to that on which the pressure is applied thereto, so that it may be stably held without moving in the molding space. Also, after the support rod is drawn out of the engagement groove of the molded arm, a hole is left in the groove. However, the hole cannot be externally observed, because connection of the arm to a trunk of a doll permits the engagement groove to be out of sight. This prevents a deterioration in appearance of the arm.

The mold for insert molding of an arm for an elastic doll according to the present invention is so constructed that the first split mold member (fixed mold member) and second split mold member (movable mold member) are each formed therein with molding spaces each having a configuration corresponding to a configuration of a portion of each of a pair of left and right arms extending from a shoulder of the arm to a hand thereof, respectively. Also, the single continuous metal core is arranged between the molding spaces of the mold members. Then, the core is firmly held at a central portion thereof by the fixing means formed on the mating surfaces of the mold members. Such construction permits the core to be firmly supported in the molding spaces, to thereby be stationarily held at a predetermined position therein during the molding operation while permitting the mold to be simplified in structure. Thus, the mold of the present invention provides arms for an elastic doll in each of which the core is appropriately embedded and which exhibit stable quality. Also, the molded arms are each solid and free from a cavity and give the same touch as that of a leg member having the core embedded therein, to thereby be prevented

from giving a user an abnormal or strange feeling or impression.

In one embodiment of the present invention, the fixing means for fixing the metal core may be constituted by the grooves formed on the mold members. This merely requires processing of the mold, resulting in arrangement of any additional member being eliminated, leading to a reduction in manufacturing cost thereof. The metal core received in the grooves is fixed at at least three points, resulting in it being firmly supported in the grooves.

Further, one embodiment of the present invention is so configured that the metal core is temporarily held on the fixed mold member using the temporary holding means. This facilitates joining of the movable mold member to the fixed mold member in a superposed manner.

Moreover, one embodiment of the present invention permits the molded article to be forced out of the molding spaces together with the metal core, so that removal of the molded article from the mold may be facilitated.

# CLAIMS

1. An arm for an elastic doll, which arm is formed of a molding material by molding, characterized in that:

a core made of metal is arranged in the arm;

5 said core being provided on a distal end thereof or a portion thereof positioned in proximity to said distal end with a spacer having a sectional area smaller than that of the arm;

said spacer being made of a material compatible with said molding material for the arm.

10 2. An arm for an elastic doll as defined in claim 1, wherein said spacer is provided on a periphery thereof with tapered projections.

15 3. An arm for an elastic doll as defined in claim 1 or 2, wherein said core is formed thereon with a detachment-preventing section for preventing detachment of said spacer therefrom.

4. An arm for an elastic doll as defined in claim 3, wherein said core is formed at said distal end thereof with a bent section; and

20 said spacer is formed with an engagement hole in which said bent section is engagedly fitted.

5. A method for molding an arm for an elastic doll, comprising the steps of:

25 forming a molding space for molding a portion of the arm extending from a shoulder thereof to a hand thereof in a mold;

arranging a metal core in said molding space so as to extend along a center of said molding space, said core being fixed at one end thereof in a proximal section of said molding space which corresponds to a proximal portion of the shoulder of the arm, said core being provided at the other end thereof or a portion thereof positioned in proximity to the other end with a spacer for keeping said core spaced at a predetermined interval from an inner surface of said molding space; and

30 injecting a molten molding material into said molding

space;

said spacer being made of a synthetic resin material which is compatible with said molding material and has a melting point equal to or below a molding temperature of said molding material.

6. A method for molding arms for an elastic doll, comprising the steps of:

forming a pair of molding spaces for molding portions of the arms each extending from a shoulder of the arm to a hand thereof in a mold including mold members, said molding spaces being formed opposite to each other to permit proximal sections thereof which respectively correspond to proximal portions of the shoulders of the arms to face each other;

arranging a metal core in said molding spaces so as to continuously extend along a center of said molding spaces; said core being provided at each of ends thereof or a portion thereof positioned in proximity to the end with a spacer for keeping said core spaced at a predetermined interval from inner surfaces of said molding spaces; and

injecting a molten molding material into said molding spaces;

said core being formed at a portion thereof positioned between said molding spaces with a bent section;

said mold members having respective mating surfaces, one of which is formed thereon with projections engaged with said bent section of said core and opposite sides of said core to stationarily hold said core;

said spacer being made of a synthetic resin material which is compatible with said molding material and has a melting point equal to or below a molding temperature of said molding material.

7. A method for molding arms for an elastic doll, comprising the steps of:

forming a pair of molding spaces for molding portions of

the arms each extending from a shoulder of the arm to a hand thereof in a mold including mold members, said molding spaces being formed opposite to each other to permit proximal sections thereof which respectively correspond to proximal portions of the shoulders of the arms to face each other; and

arranging a metal core in said molding spaces so as to continuously extend along a center of said molding spaces while keeping both side portions of said core respectively projected into said molding spaces, joining said mold members of said mold to each other so as to hold said core fixed on mating surfaces of said mold members to keep both sides of said core floated in said molding spaces; and

injecting a molten molding material into said molding spaces.

8. A method for molding an arm for an elastic doll, comprising the steps of:

forming a molding space for molding a portion of the arm extending from a shoulder of the arm to a hand thereof in a mold, the shoulder of the arm being provided with an engagement groove adapted to be engaged with a trunk of a doll;

arranging a metal core in said molding space so as to extend along a center of said molding space and holding said core at a predetermined position in said molding space by a holding means;

arranging a support rod at a site in said molding space corresponding to said engagement groove, said support rod functioning to support said core against an injection pressure of a molding material during molding of the arm; and

injecting the molten molding material into said molding space.

9. A method for molding an arm or arms for an elastic doll as defined in claim 5 or 6, wherein the shoulder of the arm is provided with an engagement groove adapted to be engaged with a trunk of a doll;

further comprising the step of arranging a support rod at a site in said molding space corresponding to said engagement groove, said support rod functioning to support said core against an injection pressure of a molding material during molding of the arm.

10. A method for molding arms for an elastic doll as defined in claim 6 or 7, further comprising the steps of:

separating said mold members from each other after molding of the arms; and

removing a portion of the core exposed from the shoulder of each of the arms.

11. A mold for insert molding of arms for an elastic doll, comprising:

first and second split mold members, said first and second split mold members being formed therein with molding spaces each having a configuration corresponding to a configuration of a portion of each of the arms extending from a shoulder of the arm to a hand thereof, respectively, said molding spaces of said first and second split mold members being formed opposite to each other while being spaced at an interval from each other to permit proximal sections thereof which respectively correspond to proximal portions of the shoulders of the arms to face each other;

said first and second split mold members having mating surfaces; and

a fixing means for fixing a metal core for connecting both arms to each other;

said fixing means being formed on said mating surfaces between said molding spaces.

12. A mold for insert molding of arms for an elastic doll as defined in claim 11, wherein said fixing means is constituted by a recess for receiving said core therein and constructed so as to fix said core at three points.

13. A mold for insert molding of arms for an elastic



doll as defined in claim 11, wherein said core has a bent section arranged between said molding spaces of each of said first and second split mold members; and

5       said fixing means includes a projection provided on one of said first and second split mold members so as to be engaged with said bent section of said core.

10       14. A mold for insert molding of arms for an elastic doll as defined in claim 13, wherein said fixing means further includes a pair of second projections arranged at each of a plurality positions on said one of said first and second split mold members;

      each pair of said second projections being arranged to interposingly hold opposite sides of said core therebetween.

15       15. A mold for insert molding of arms for an elastic doll as defined in claim 11, wherein each of the arms is provided at the shoulder thereof with an engagement groove adapted to be engaged with a trunk of a doll;

20       further comprising a support rod for supporting said core against an injection pressure of a molding material during molding of the arms;

      said support rod being arranged at a site in each of said molding spaces corresponding to the engagement groove.

25       16. A mold for insert molding of arms for an elastic doll as defined in claim 11, wherein said mating surface of one of said first and second split mold members is provided thereon with a temporary holding means for temporarily holding said core thereon.

30       17. A mold for insert molding of arms for an elastic doll as defined in claim 11, further comprising a pin member for forcing out said core from said molding spaces after molding of the arms, said pin member being arranged so as to be permitted to retractably project from said mating surface of one of said first and second split mold members.

ABSTRACT

An arm (17A, 17B, 17C) for an elastic doll capable of preventing torsional rotation of a core (10) in a molding material molded. The elastic doll arm includes the core (10) made of metal and arranged therein. The metal core (10) is provided on a distal end thereof or a portion thereof positioned in proximity to the distal end with a spacer (13) having a sectional area smaller than that of the arm. A material for the spacer (13) and the molding material for the arm are compatible with each other, resulting in the spacer (13) being integrated with the molding material.

# ***PRICE AND GESS***

ATTORNEYS AT LAW

JOSEPH W. PRICE  
ALBIN H. GESS  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

2100 S.E. MAIN STREET, SUITE 250  
IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

OF COUNSEL  
JAMES F. KIRK

e-mail: [pgu@pgulaw.com](mailto:pgu@pgulaw.com)

## **COMBINED DECLARATION AND POWER OF ATTORNEY IN ORIGINAL PATENT APPLICATION**

Applicant(s):

Kazuo Ohba

Title:

ARM FOR ELASTIC DOLL, METHOD FOR MOLDING  
SAME AND MOLD THEREFOR

Attorney's  
Docket No.:

KAM1-BN12

**"EXPRESS MAIL" MAILING  
LABEL NO. EL227718351US**

**DATE OF DEPOSIT: November 29, 2000**

COMBINED DECLARATION AND POWER OF ATTORNEY  
IN ORIGINAL APPLICATION

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought, entitled:

Arm for elastic doll, method for molding same and mold therefor

the specification of which:

(check one)

☐ is attached hereto.

☒ was filed on May 10, 2000 as

PCT International

Application Serial No. PCT/JP00/02980

and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Foreign Application(s), if any, for Patent or Inventor's Certificate Filed Within 12 Months Prior to the Filing Date of This Application:

Country	Application No.	Date of Filing (Day, Month, Year)	Priority Claimed Under 35 U.S.C. 119
Japan	11-129203	10/05/1999	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Japan	11-210927	26/07/1999	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Japan	11-229139	13/08/1999	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Japan	11-294557	15/10/1999	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
			Yes <input type="checkbox"/> No <input type="checkbox"/>
			Yes <input type="checkbox"/> No <input type="checkbox"/>

All Foreign Applications, if any, for Patent or Inventor's Certificate Filed More Than 12 Months Prior to the Filing Date of This Application:

Country	Application No.	Date of Filing

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(1) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Joseph W. Price (Reg. 25,124)  
Albin H. Gess (Reg. 25,726)  
Franklin D. Ubell (Reg. 27,009)

Joseph C. Andras (Reg. 33,469)  
Kenneth L. Sherman (Reg. 33,783)  
Daniel C. Mallery (Reg. 33,532)

Send Correspondence To:

PRICE, GESS & UBELL  
2100 S.E. Main Street, Suite 250  
Irvine, California 92714  
Telephone: 714/261-8433

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment or both (18 U.S.C. 1001) and may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR		INVENTOR'S SIGNATURE		DATE
Kazuo OHBA		KAZUO OHBA		23/05/2000
RESIDENCE			CITIZENSHIP	
Saitama, Japan			Japan	
POST OFFICE ADDRESS				
1-29-3, Nakasone, Yoshikawa-shi, Saitama 432-0033 Japan				
FULL NAME OF SECOND JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE			CITIZENSHIP	
POST OFFICE ADDRESS				
FULL NAME OF THIRD JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE			CITIZENSHIP	
POST OFFICE ADDRESS				
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE			CITIZENSHIP	
POST OFFICE ADDRESS				
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE			CITIZENSHIP	
POST OFFICE ADDRESS				
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY		INVENTOR'S SIGNATURE		DATE
RESIDENCE			CITIZENSHIP	
POST OFFICE ADDRESS				

# ***PRICE AND GESS***

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

JOSEPH W. PRICE  
ALBIN H. GESS  
MICHAEL J. MOFFATT  
GORDON E. GRAY III  
BRADLEY D. BLANCHE

OF COUNSEL  
JAMES F. KIRK

A PROFESSIONAL CORPORATION  
TELEPHONE: (949) 261-8433  
FACSIMILE: (949) 261-9072  
FACSIMILE: (949) 261-1726

e-mail: [pgu@pgulaw.com](mailto:pgu@pgulaw.com)

## **DRAWINGS - FOURTEEN (14) SHEETS**

Applicant(s):

Kazuo Ohba

Title:

ARM FOR ELASTIC DOLL, METHOD FOR MOLDING  
SAME AND MOLD THEREFOR

Attorney's  
Docket No.:

KAM1-BN12

**"EXPRESS MAIL" MAILING**  
**LABEL NO. EL227718351US**

**DATE OF DEPOSIT: November 29, 2000**

FIG. 1B



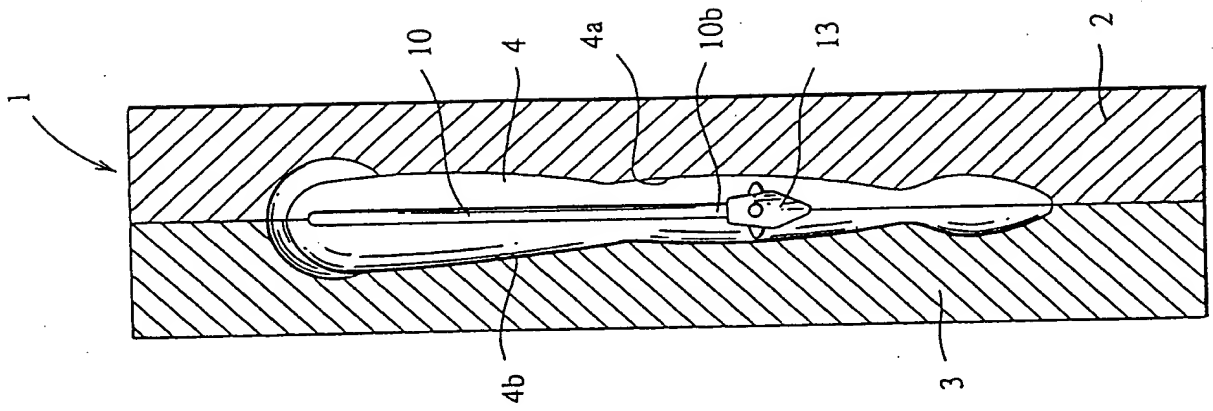


FIG. 1A

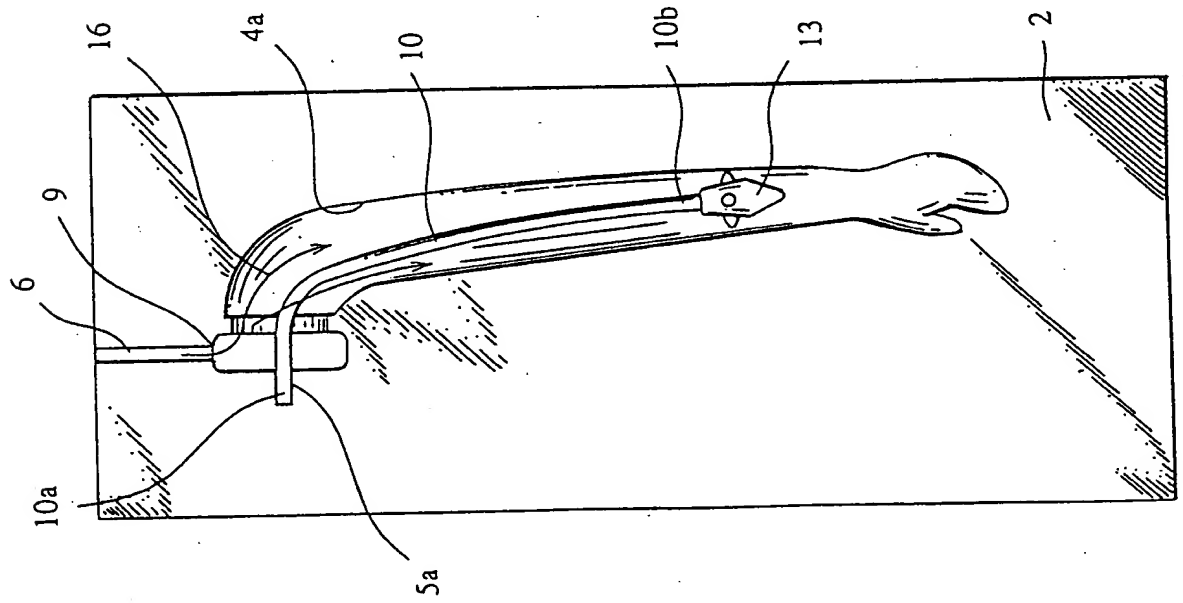

**FIG. 2**

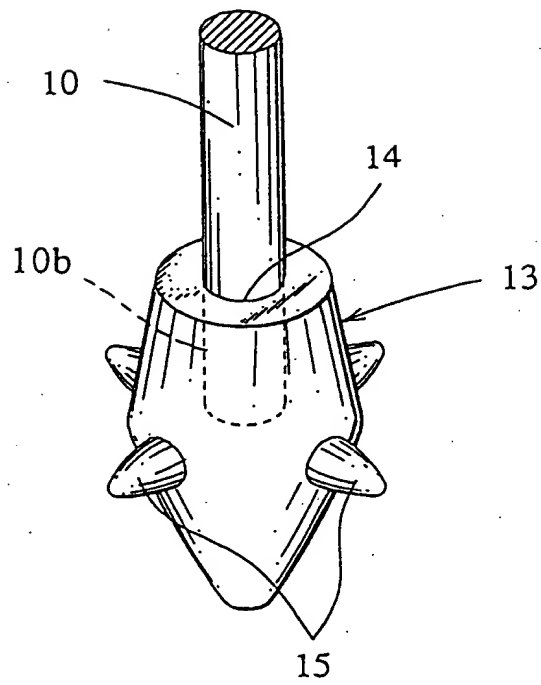

**FIG. 3**

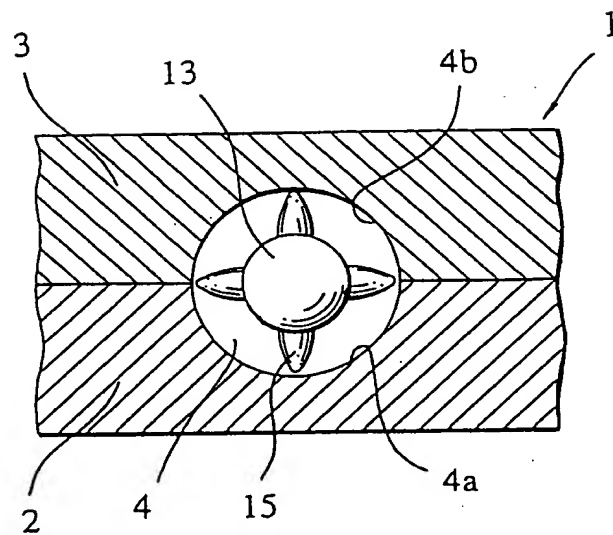




FIG. 4C

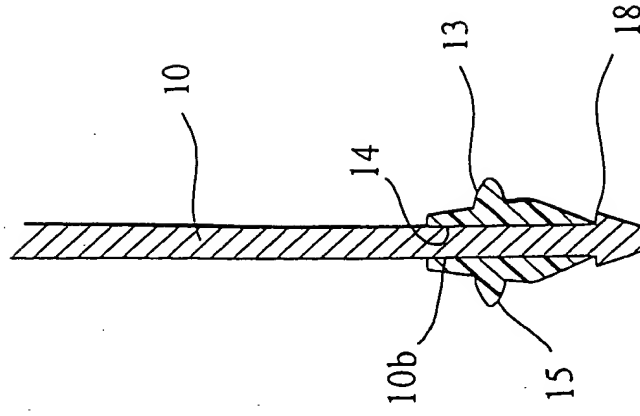


FIG. 4B

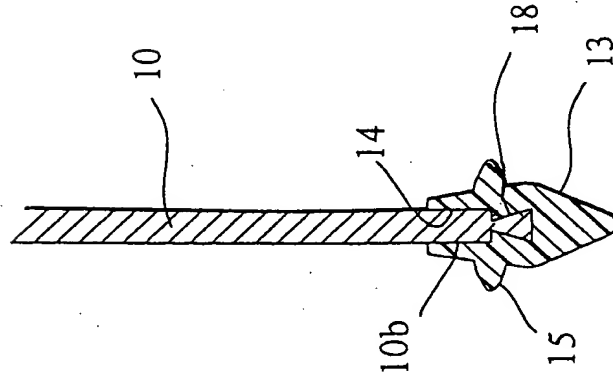


FIG. 4A

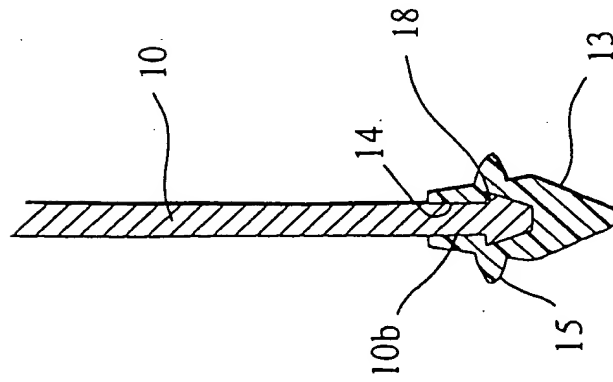


FIG. 5



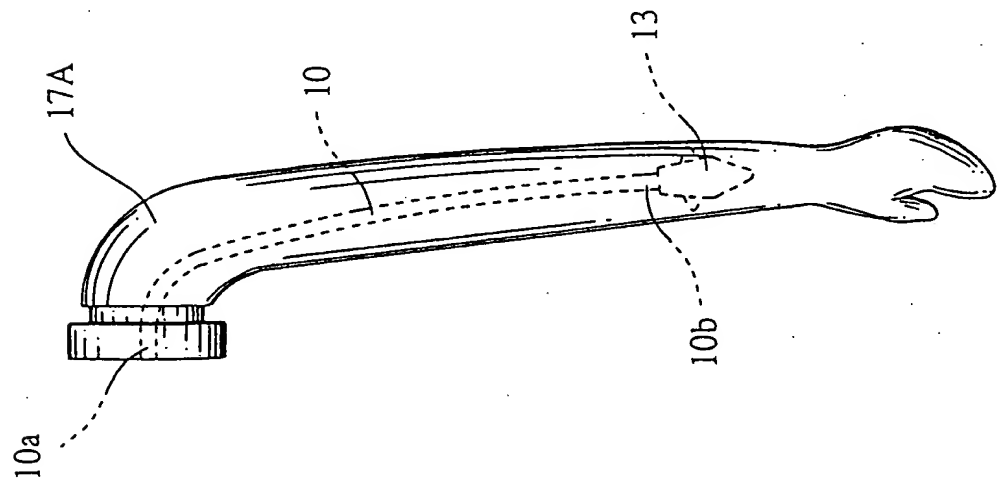



FIG. 6

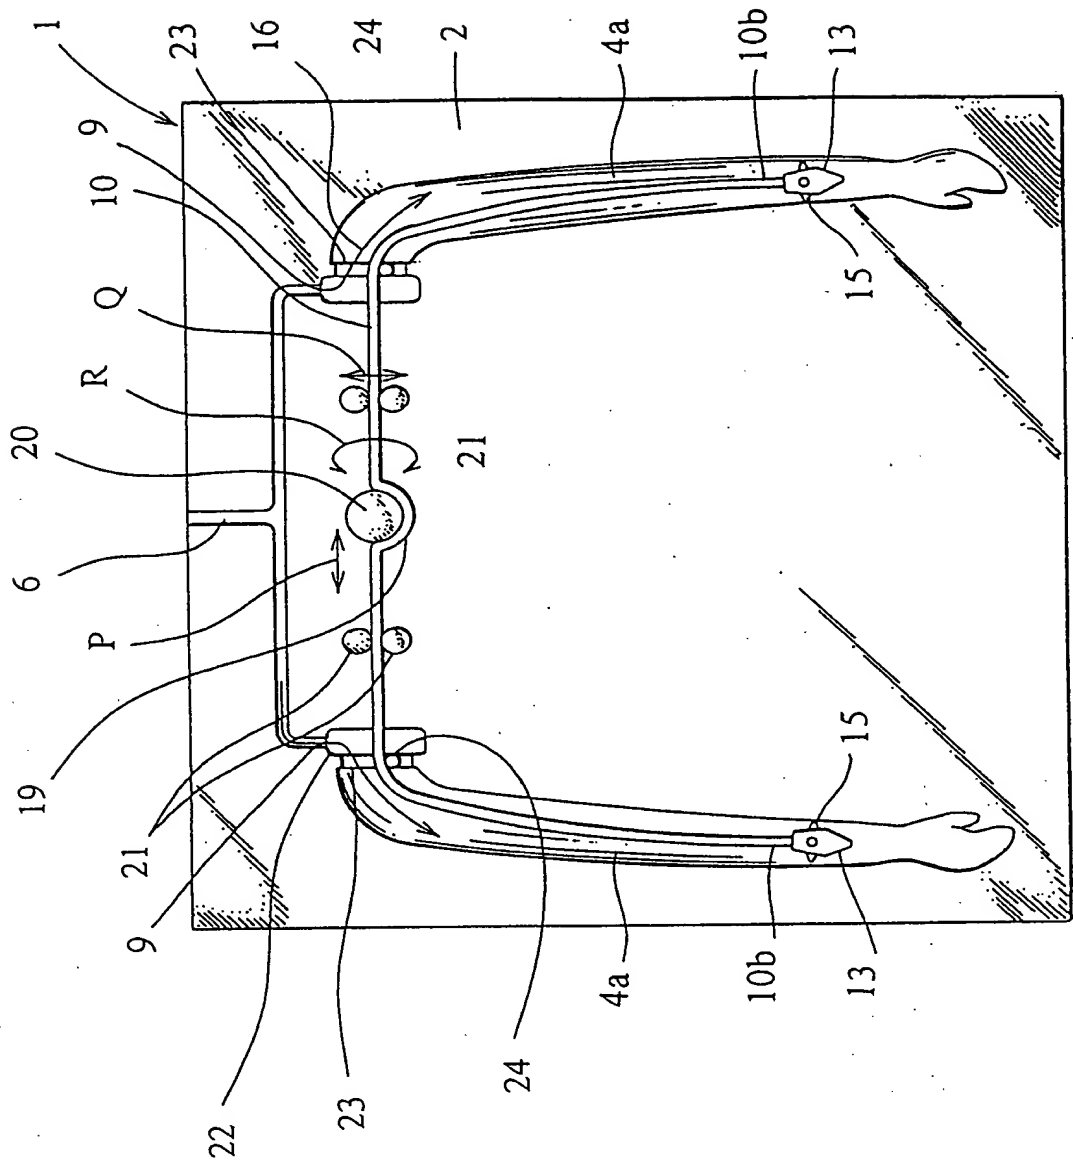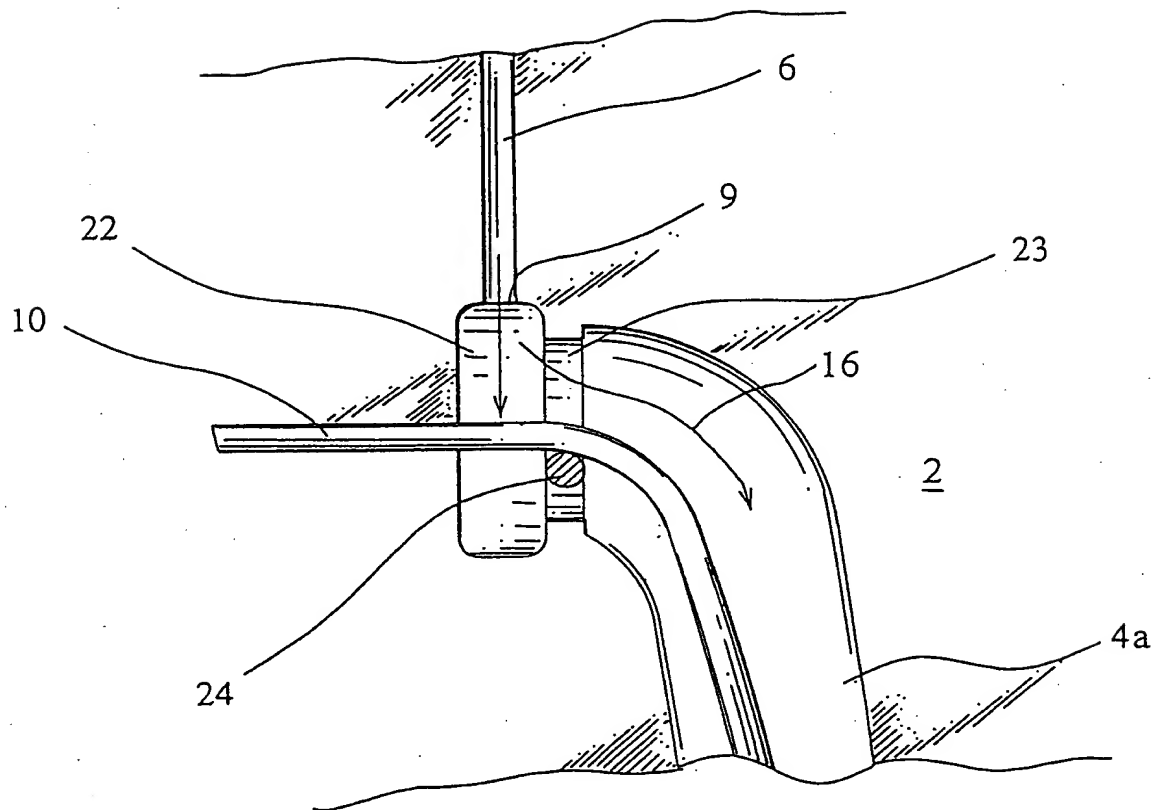


**FIG. 7**

6/14


**FIG. 8A**

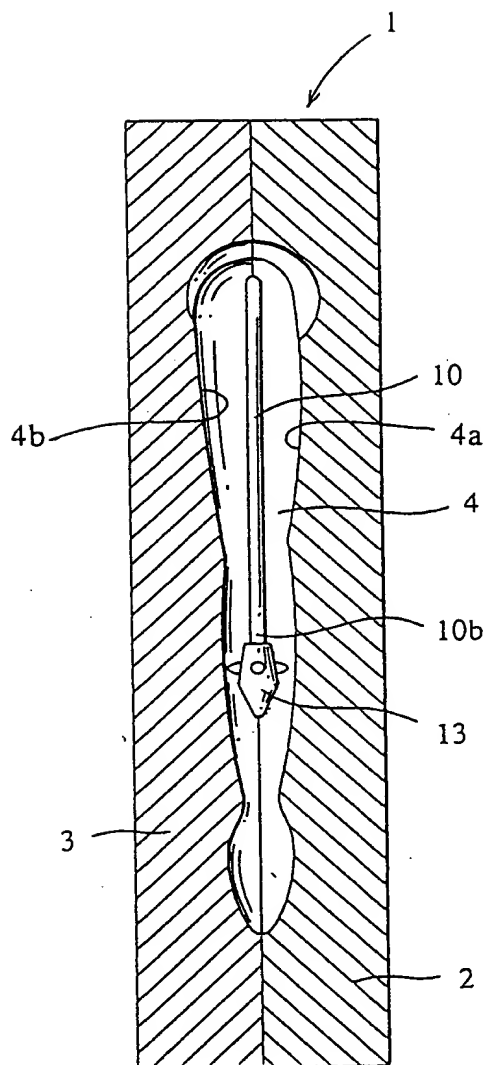


**FIG. 8B**

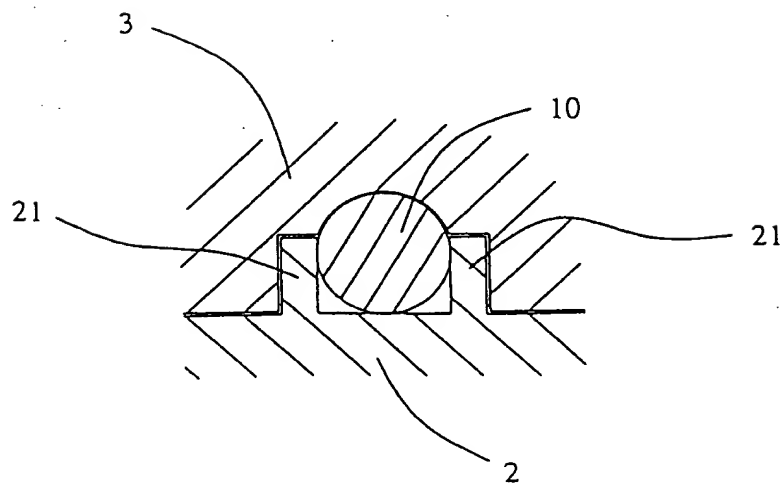


**FIG. 9**

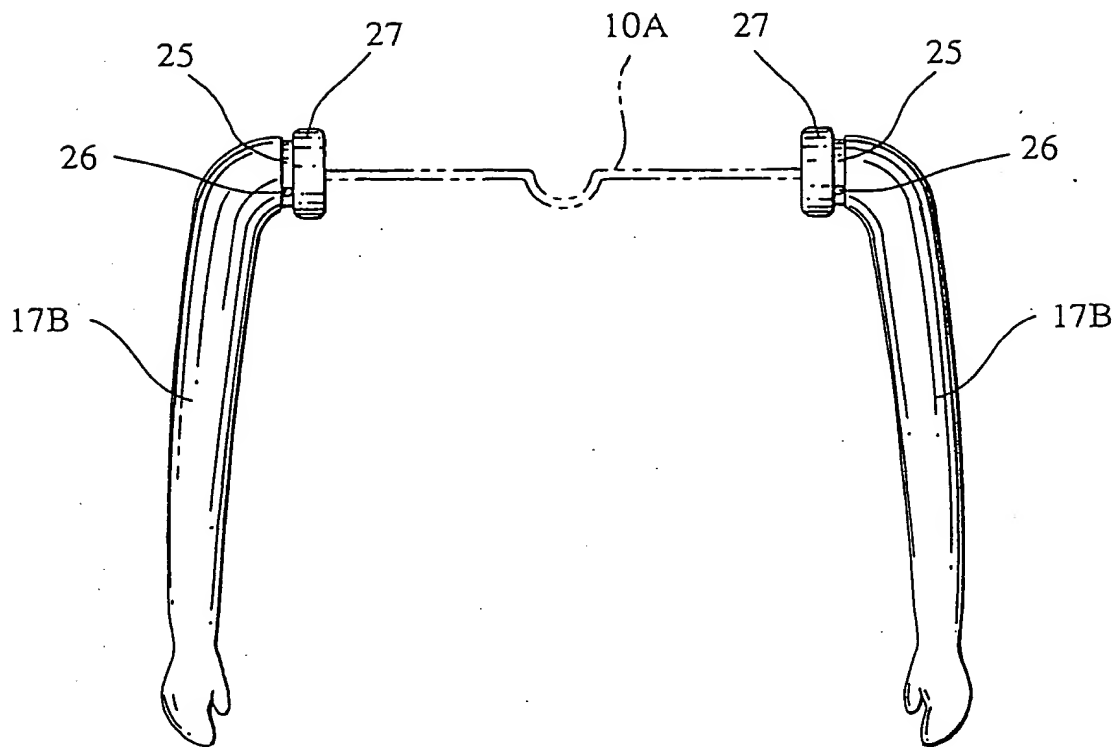



**FIG. 10**

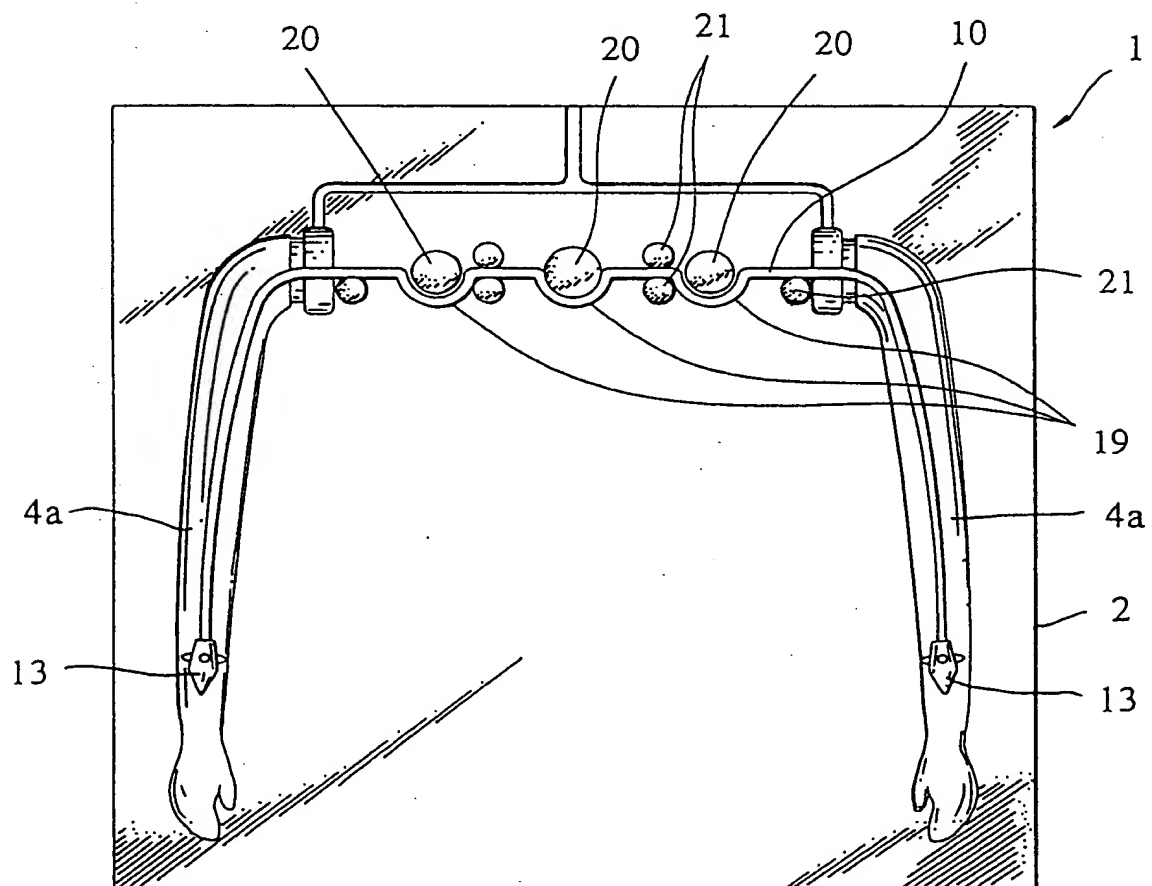

**FIG. 11**

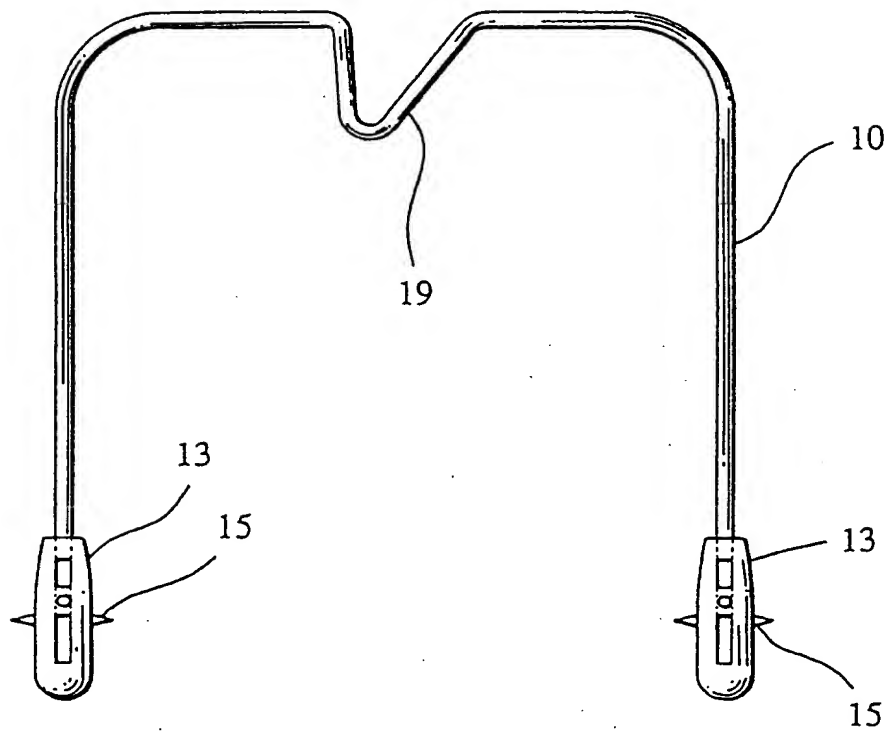

**FIG. 12**

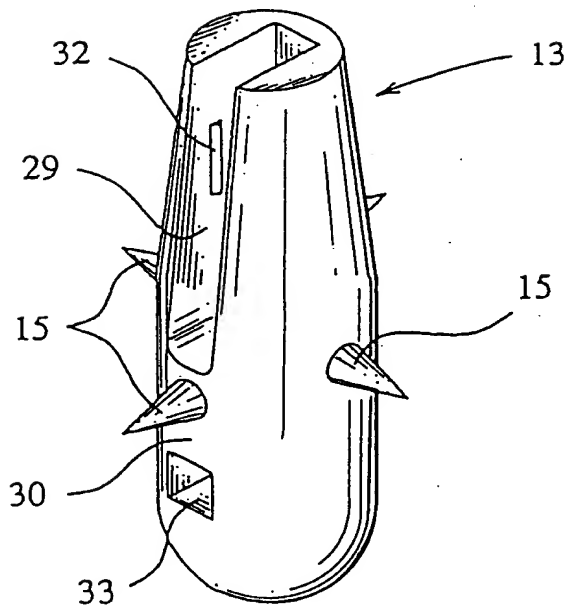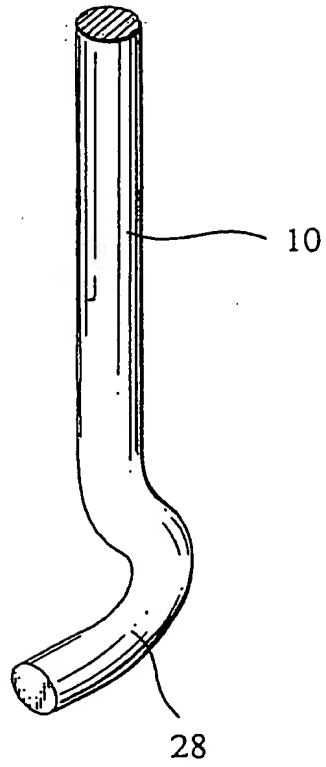


**FIG. 13**



FIG. 14







FIG. 15

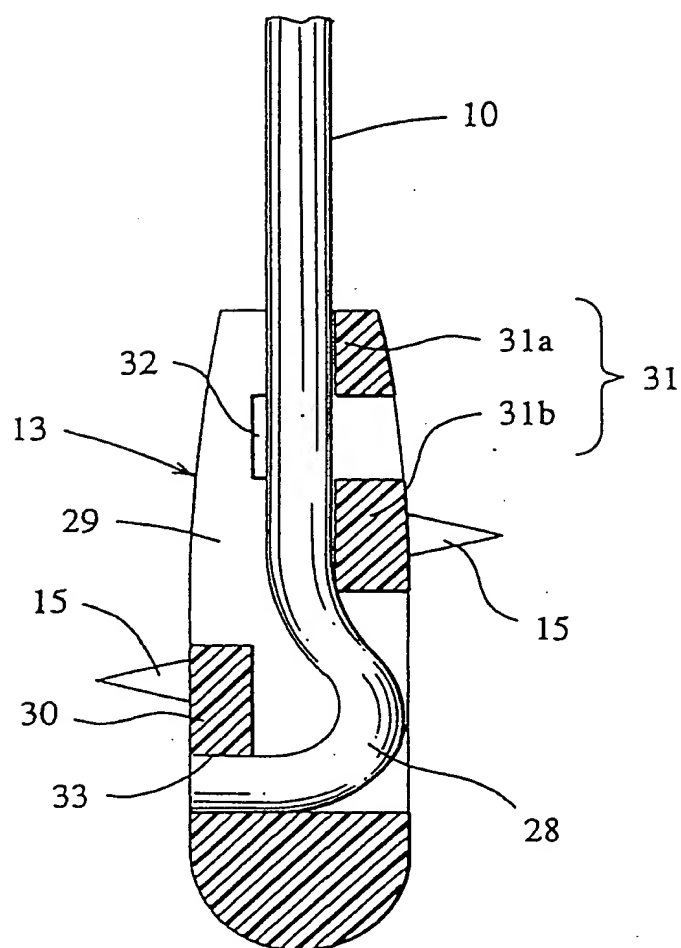


**FIG. 16A**

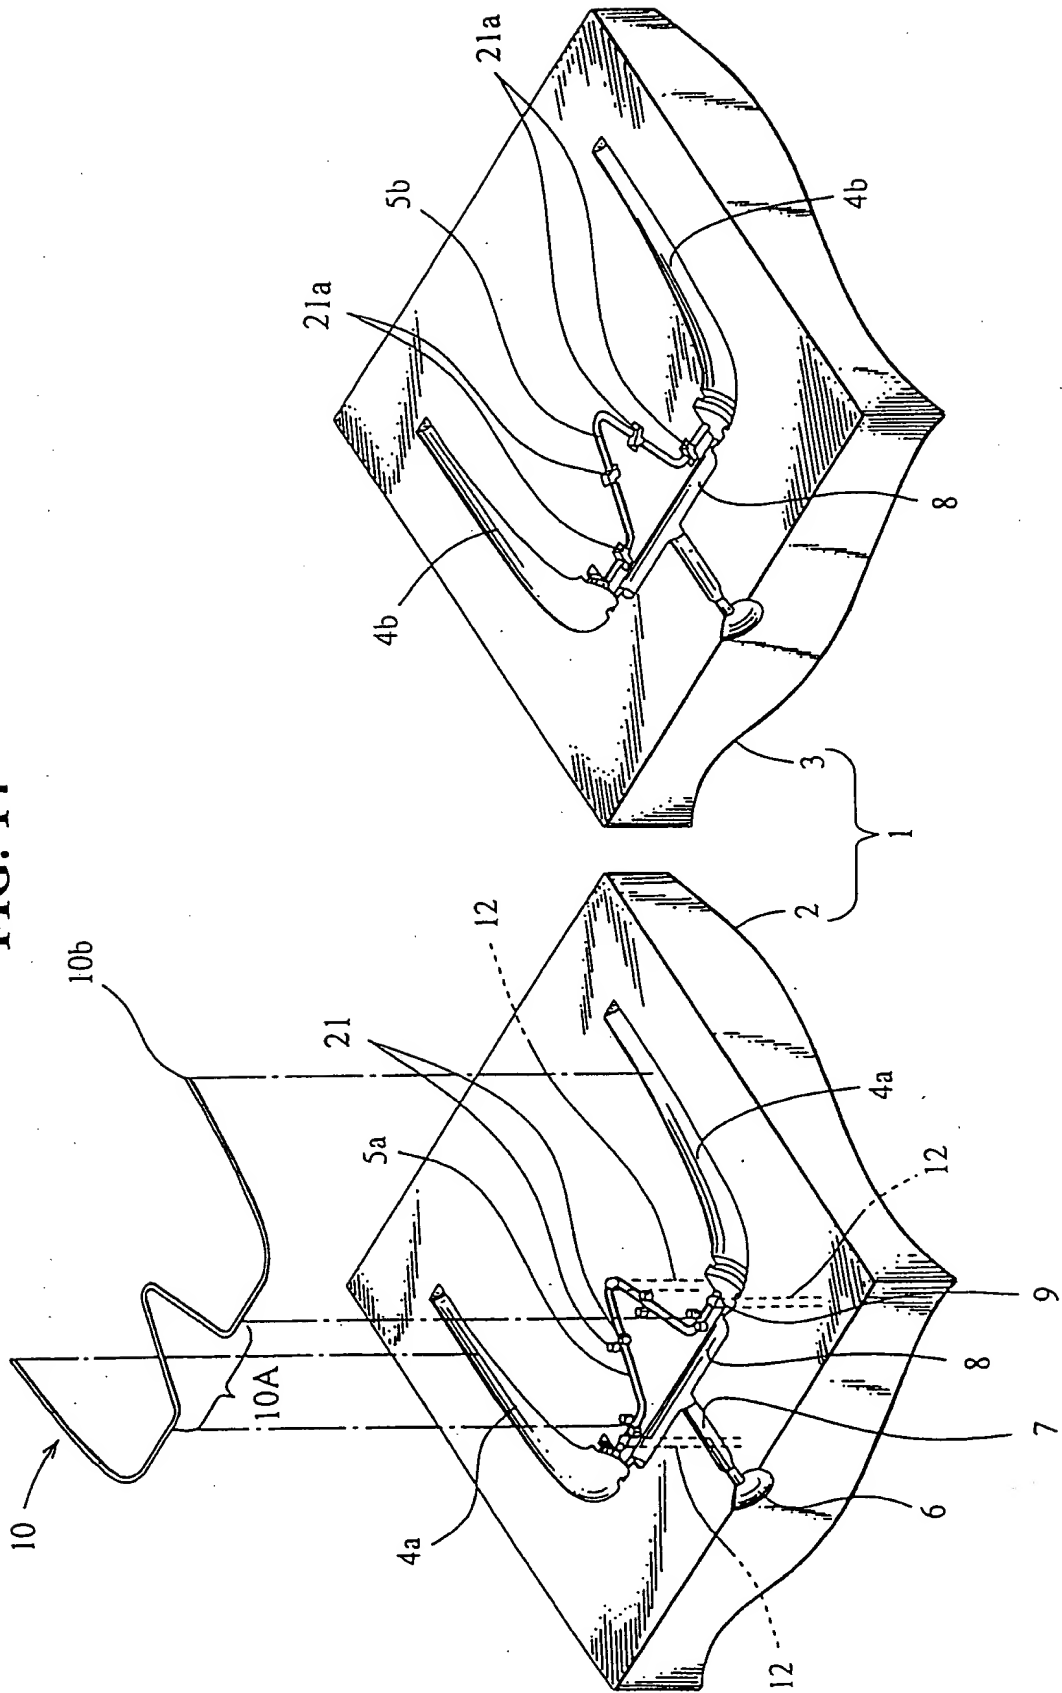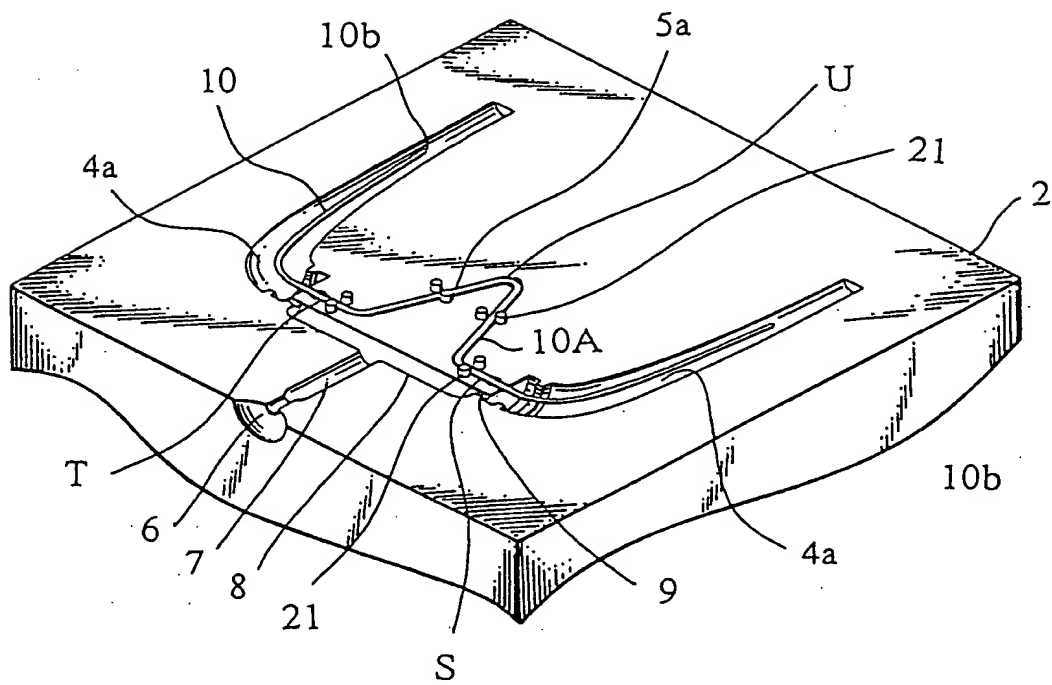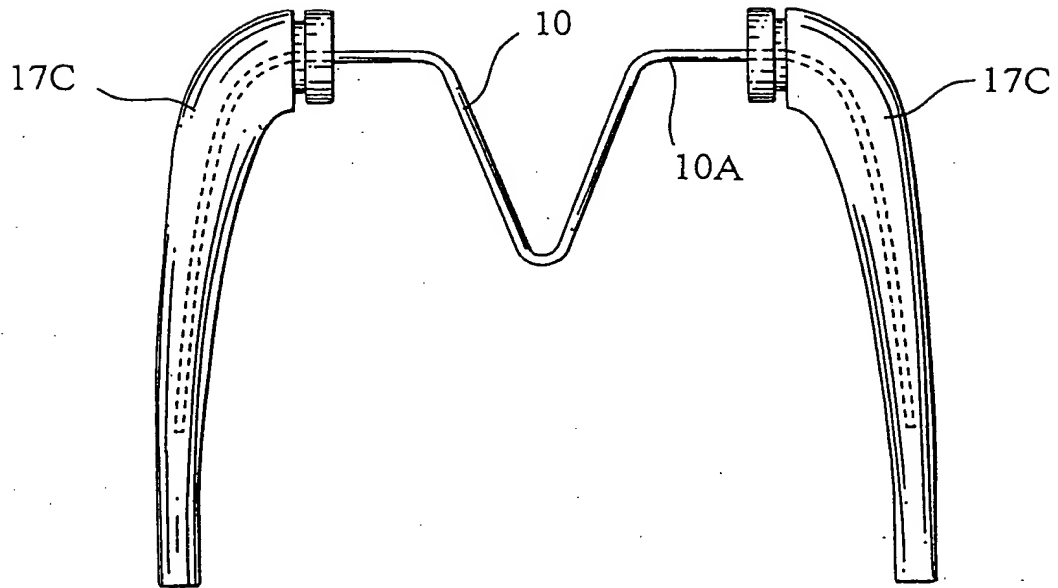

**FIG. 16B**

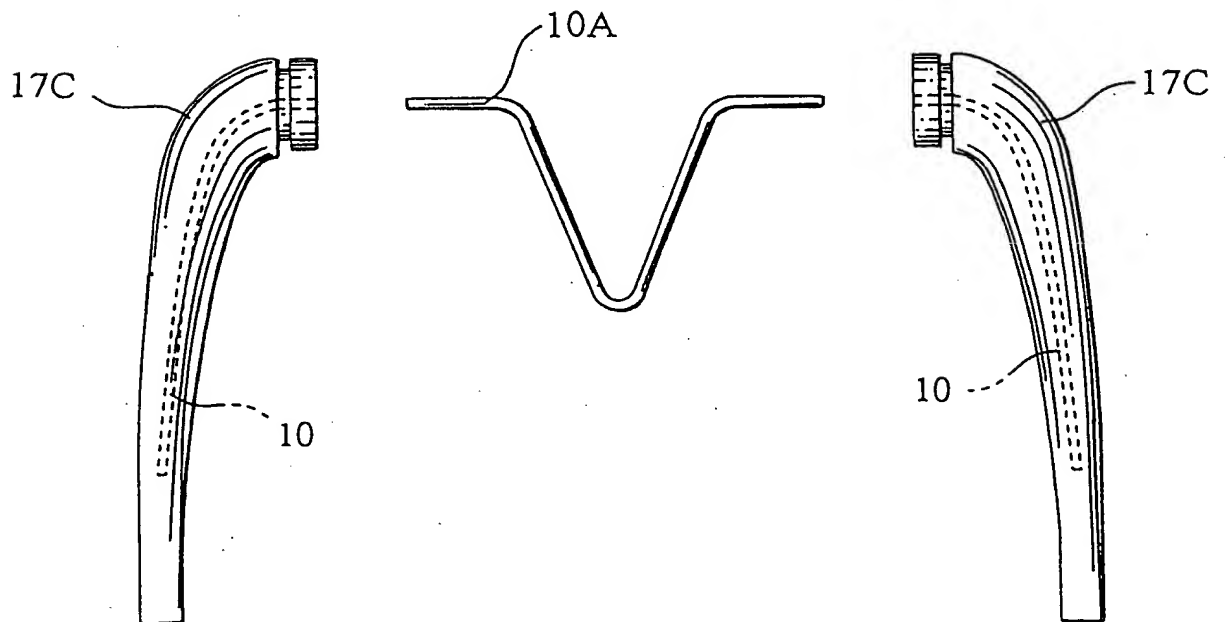

**FIG. 17**

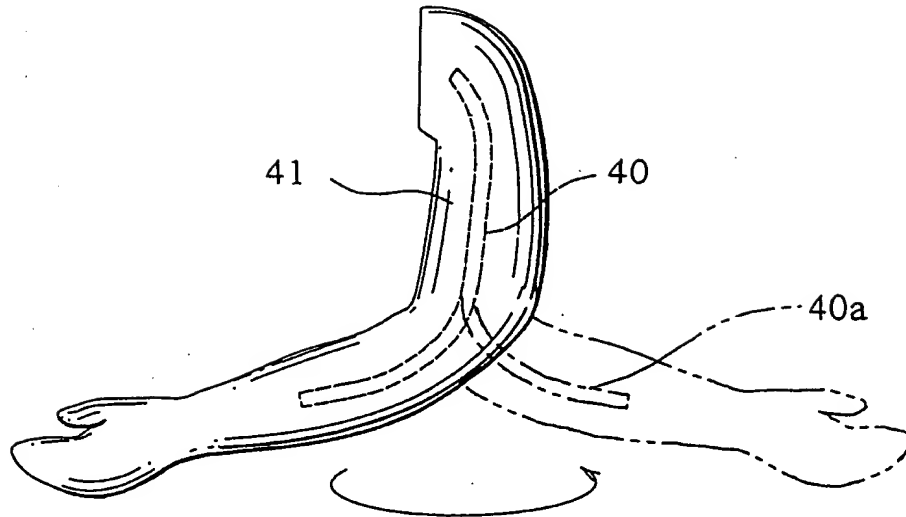

**FIG. 18**

